





CHEMICAL RESISTANCE

MATERIALS COMPATIBILITY GUIDE

~ For Sandpiper & Marathon AODD Pumps ~

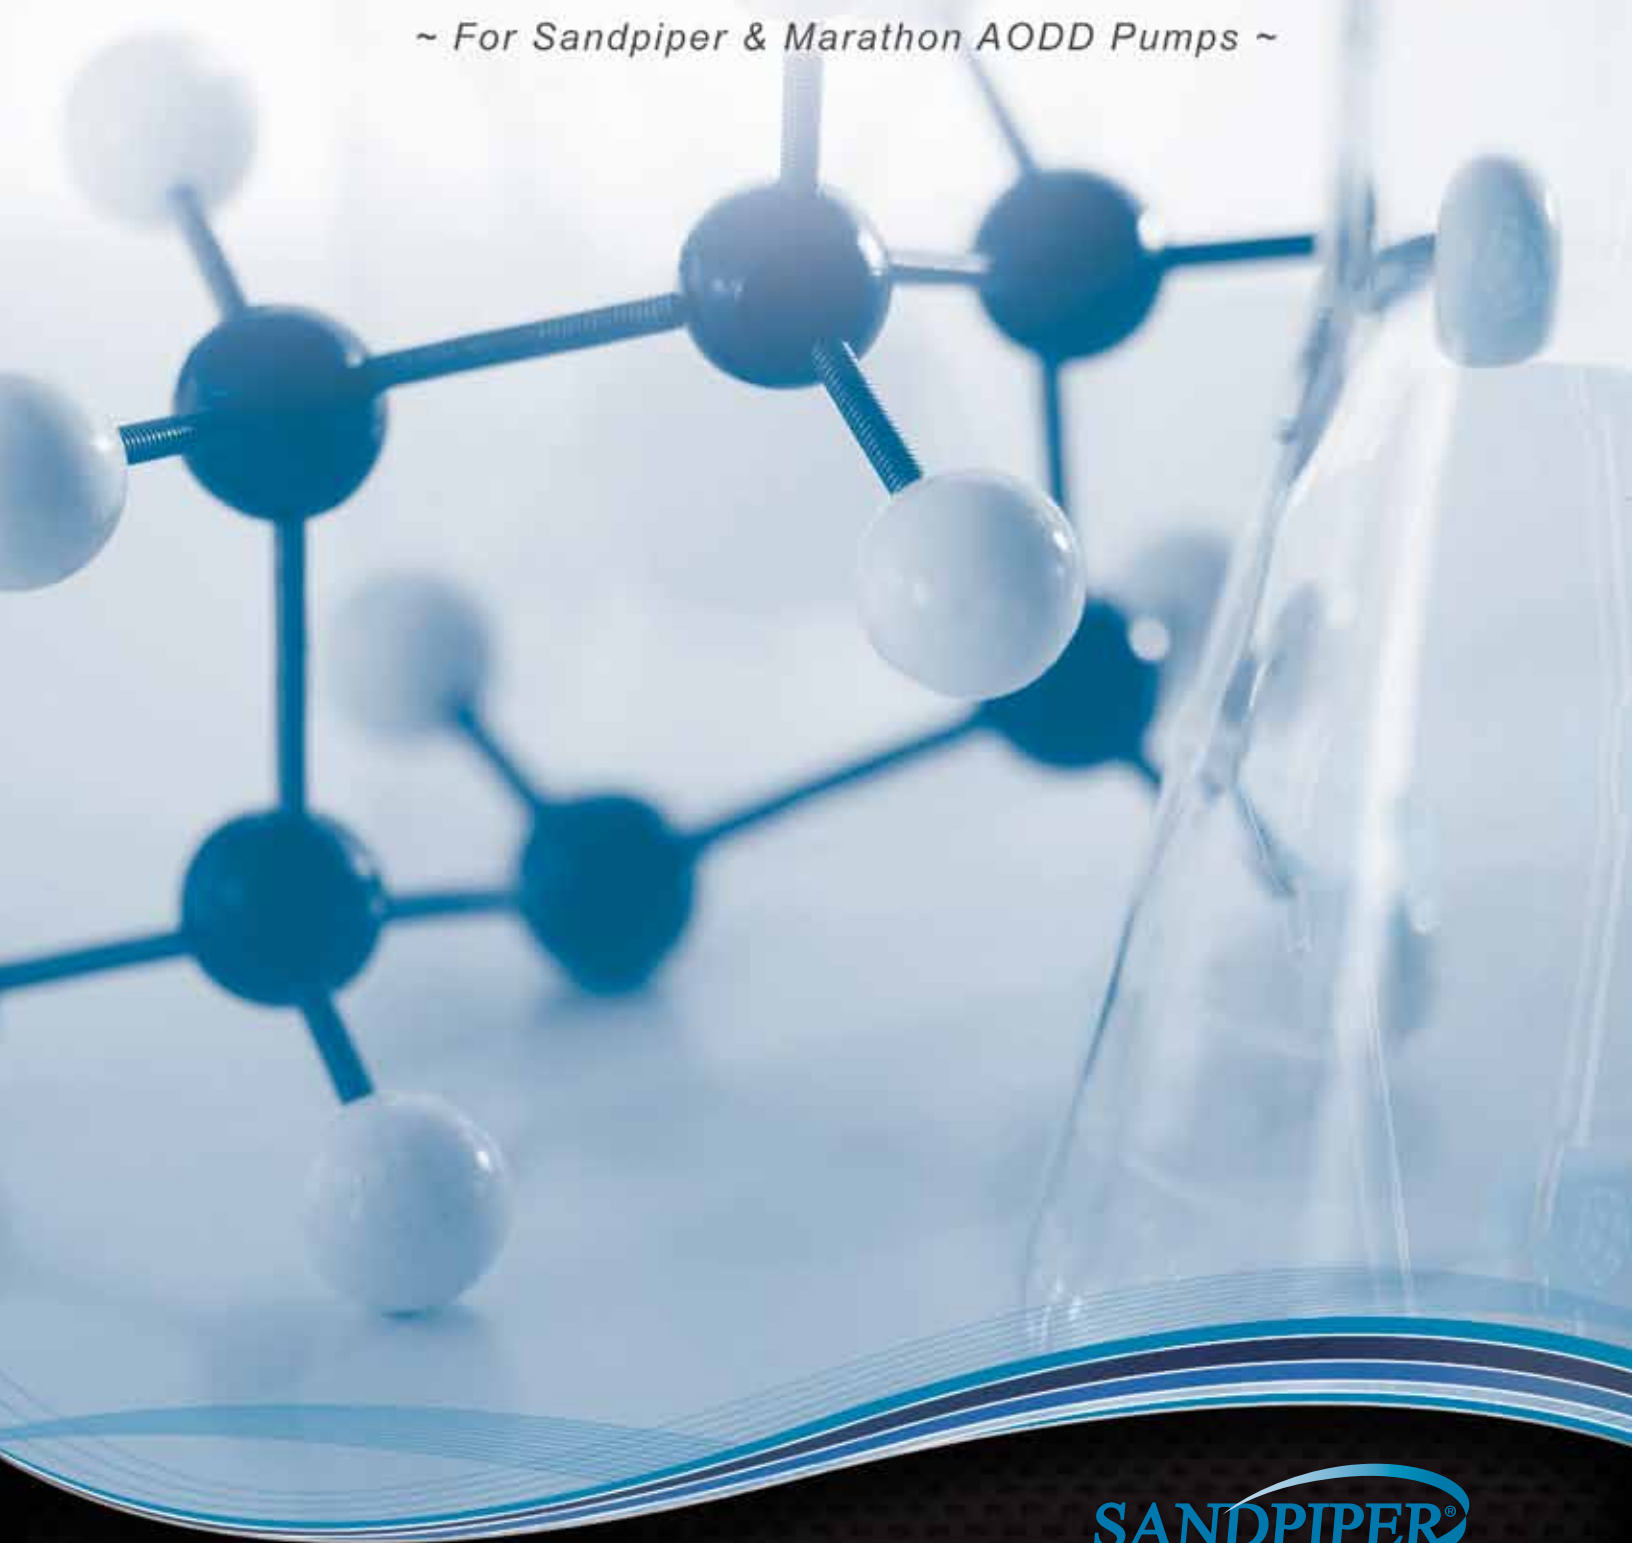


Materials Available for Sandpiper Pumps



SIZE	MODELS	MAX FLOW	Wetted Materials										Non-Wetted Materials					
			AL	PP	K	NY	CP	CA	CV	CI	SS	HC	CP	SS	CI	CA	AL	PP
HEAVY DUTY BALL VALVE																		
1"	SB1	42 gpm (159 l/min)	**EX										*EX	*EX			*EX	**EX
1½"	HDB1½	90 gpm (340 l/min)	**EX										*EX	*EX	*EX		*EX	**EX
2"	HDB2	135T gpm (511 l/min)	**EX										*EX	*EX	*EX		*EX	**EX
3"	HDB3	260 gpm (984 l/min)											*EX	*EX			*EX	
4"	HDB4	260 gpm (984 l/min)											*EX	*EX			*EX	
HEAVY DUTY FLAP VALVE																		
1"	HDF1	70 gpm (265 l/min)	**EX										*EX	*EX			*EX	**EX
2"	HDF2	140 gpm (530 l/min)	**EX										*EX	*EX			*EX	**EX
3"	HDF3M	260 gpm (984 l/min)	**EX										*EX				*EX	**EX
4"	HDF4M	260 gpm (984 l/min)	**EX										*EX				*EX	**EX
STANDARD DUTY METALLIC																		
¼"	X02	4.4 gpm (16.6 l/min)												*EX			*EX	
½"	S05	15 gpm (57 l/min)	**EX											*EX	*EX	*EX		**EX
1"	S1F	45 gpm (170 l/min)	**EX										*EX	*EX	*EX		*EX	**EX
1½"	S15	106 gpm (401 l/min)	**EX										*EX	*EX	*EX		*EX	**EX
2"	S20	150 gpm (568 l/min)	**EX										*EX	*EX	*EX		*EX	**EX
3"	S30	235 gpm (889 l/min)	**EX										*EX	*EX	*EX		*EX	**EX
STANDARD DUTY NON-METALLIC																		
¼"	PB¼	4 gpm (15 l/min)		●	●	●							*EX				*EX	●
½"	S05	14 gpm (53 l/min)		●	●	●	*EX							*EX				●
¾"	S07	23 gpm (87 l/min)		●	●	●												●
1"	S10	23 gpm (87 l/min)		●	●	●												●
1"	S1F	45 gpm (170 l/min)						*EX					*EX				*EX	
1½"	S15	100 gpm (378 l/min)						*EX									*EX	
2"	S20	160 gpm (606 l/min)						*EX									*EX	
3"	S30	238 gpm (901 l/min)		●	●													●
Tranquilizer - Surge Suppressors																		
1"	TA1		EX										EX	EX				EX
1"	TA25		EX										EX	EX				EX
1½"	TA1 1/2		EX										EX	EX	EX			EX
1½"	TA40		EX										EX	EX	EX			EX
2"	TA2		EX										EX	EX	EX			EX
2"	TA50		EX										EX	EX	EX			EX
3"	TA3		EX										EX	EX	EX			EX
3"	TA80		EX										EX	EX	EX			EX


AL=Aluminum CP=Conductive Polypropylene K=PVDF SS=Stainless Steel
 CA=Conductive Acetal CV=Conductive PVDF NY=Nylon
 CI =Cast Iron HC=Alloy C PP=Polypropylene


What is ATEX?


ATEX  (Atmosphères Explosibles) is an acronym for the standard set by the European Parliament & Council of the European Union, recognized throughout the European Community as the safety standard for equipment used in potentially hazardous environments.

What are the assurances of full compliance?

Products marked with the EX hexagon symbol followed by the Group and Category of safety protection indicates that the products are certified to Directive 94/9/EC.

 II 2G c T5, II 3/2 G c T5, II 2D c T100°C
 KEMA09ATEX0073 X

*  II 1G c T5, II 3/1 G c T5, II 1D c T100°C
 I M1 c, I M2 c
 KEMA09ATEX0071 X

**  II 2G c T5, II 3/2 G c T5, II 2D c T100°C
 KEMA09ATEX0072 X

● Available

This publication is intended as a general guide for pump material selection. It includes many common liquids used in chemical, paint, industrial and food processing applications. This chart has been compiled using many sources, all believed to be reliable. However, the information accuracy of these ratings cannot be guaranteed.

Due to the extensive scope of this field, the tabulation is not complete, nor is it conclusive.

Corrosion is the destructive attack of metals by chemical or electrochemical reaction with its environment. Corrosion rates vary widely with concentration, temperature and the presence of abrasives. Impurities or other trace elements common in industrial liquids may inhibit or accelerate corrosion. Aeration or de-aeration of the substance being pumped can also affect rate of corrosion. Materials used in the pump and pumping systems must be chemically compatible.

Elastomers are subject to destructive attack by chemicals or solvents. Attack may be evident as hardening, swelling, loss of elasticity, increased permeability, or more subtle changes.

CAUTION: Nonmetallic pumps and plastic components are not UV stabilized. Ultraviolet radiation can damage these parts and negatively affect material properties. Do not expose to UV light for extended periods of time.

In general, destructive reaction on all materials of construction increases as temperatures increase. Temperature limitations are listed here.

MATERIALS PROFILE	OPERATING TEMPERATURES		MATERIALS PROFILE	OPERATING TEMPERATURES	
	MAXIMUM	MINIMUM		MAXIMUM	MINIMUM
Nitrile General purpose, oil-resistant. Shows good solvent, oil, water, and hydraulic fluid resistance. Should not be used with highly polar solvents like acetone and MEK, ozone, chlorinated hydrocarbons, and nitro hydrocarbons	190°F 88°C	-10°F -23°C	FKM (Fluorocarbon) Shows good resistance to a wide range of oils and solvents; especially all aliphatic, aromatic and halogenated hydrocarbons, acids, animal and vegetable oils. Hot water or hot aqueous solutions (over 70° F) will attack FKM .	350°F 177°C	-40°F -40°C
EPDM Shows very good water and chemical resistance. Has poor resistance to oils and solvents, but is fair in ketones and alcohols.	280°F 138°C	-40°F -40°C	Conductive Acetal Tough, impact resistant, ductile. Good abrasion resistance and low friction surface. Generally inert, with good chemical resistance except for strong acids and oxidizing agents.	190°F 88°C	-20°F -29°C
Hytrel® Good on acids, bases, amines and glycols at room temperatures only.	220°F 104°C	-20°F -29°C	Nylon 6/6 High strength and toughness over a wide temperature range. Moderate to good resistance to fuels, oils and chemicals.	180°F 82°C	32°F 0°C
Neoprene All purpose. Resistant to vegetable oils. Generally not affected by moderate chemicals, fats, greases, and many oils and solvents. Generally attacked by strong oxidizing acids, ketones, esters, and nitro hydrocarbons and chlorinated aromatic hydrocarbons.	200°F 93°C	-10°F -23°C	Polypropylene A thermoplastic polymer. Moderate tensile and flex strength. Resists strong acids and alkalis. Attacked by chlorine, fuming nitric acid and other strong oxidizing agents.	180°F 82°C	32°F 0°C
Rupplon® (Urethane) Shows good resistance to abrasives. Has poor resistance to most solvents and oils.	150°F 66°C	32°F 0°C	PVDF (Polyvinylidene Fluoride) A durable fluoroplastic with excellent chemical resistance. Excellent for UV applications. High tensile strength and impact resistance.	250°F 121°C	0°F -18°C
Santoprene® Injection molded thermoplastic elastomer with no fabric layer. Long mechanical flex life. Excellent abrasion resistance.	275°F 135°C	-40°F -40°C	Alloy C equal to ASTM494 CW-12M-1 specification for nickel and nickel alloy.		
UHMW PE A thermoplastic polymer that is highly resistant to a broad range of chemicals. Exhibits outstanding abrasion and impact resistance, along with environmental stress-cracking resistance.	180°F 82°C	-35°F -37°C	Stainless Steel equal to or exceeding ASTM specification A743 CF-8M for corrosion resistant iron chromium, iron chromium nickel, and nickel based alloy castings for general applications. Commonly referred to as 316 Stainless Steel in the pump industry.		
Virgin PTFE (PFA/TFE) Chemically inert, virtually impervious. Very few chemicals are known to chemically react with PTFE; molten alkali metals, turbulent liquid or gaseous fluorine and a few fluoro-chemicals such as chlorine trifluoride or oxygen difluoride which readily liberate free fluorine at elevated temperatures.	220°F 104°C	-35°F -37°C	Maximum and Minimum Temperatures are the limits for which these materials can be operated. Temperatures coupled with pressure affect the longevity of diaphragm pump components. Maximum life should not be expected at the extreme limits of the temperature ranges.		

CHEMICAL Formula	ELASTOMERS									METAL PARTS				PLASTICS						
	RUPPLON™ (Polyurethane)	NEOPRENE	NITRILE	E.P.D.M.	HYTREL®	(FKM) FLUOROCARBON	BLUE GYLON®	PTFE, PFA	ENVELON®	SANTOPRENE®	ALUMINUM	CAST IRON/STEEL	STAINLESS STEEL	Alloy C (Hastelloy Equiv.)	POLYPROPYLENE	ACETAL	PVDF	NYLON	RYTON®	UHMW POLYETHYLENE
Acetaldehyde (Ethanal) CH ₃ CHO	X	X	X	A	B	X		A		B	A	B	A	A	C	A	A ^{150°}	B	A	B
Acetamide (Acetic Acid Amide) CH ₃ CONH ₂	X	B	B	A		B		A		A	A	X	X	A	A		A ^{140°}	A	A	
Acetate Solvents CH ₃ COOR		X	X			X		A		B	A		A		X	A	A	A	A	B ^{122°}
Acetic Acid — 20%	B	B	C	A	A	C		A	A	B		A	A	C	B	A	B	A		A ^{122°}
Acetic Acid — 30%	X	B	C	A	A	X		A	A	B	X	A	A	C	B	B	B			A ^{122°}
Acetic Acid — 50% CH ₃ COOH	C	C	C	A		C		A	A	B	X	A	A	C	B	B	B			A ^{122°}
Acetic Acid — Glacial CH ₃ COOH	X	X	C	B	A	X		A	A	B	B	X	A	A	C	B	A ^{120°}	X	A	B
Acetic Anhydride (Acetic Oxide) (CH ₃ CO) ₂ O	X	B	C	B	C	X	A	A	A	A	B	90%B ^{212°}	A	A	X	X	B ^{70°}	A	A	A
Acetone (Dimethylketone) CH ₃ COCH ₃	X	X	X	A	C	X	A	A	A	B	B	A	A	A	X	B ^{120°}	X	B		A ^{122°}
Acetone Cyanohydrin (CH ₃) ₂ C(OH)CN	X	B	X	X		X		A		A	B	B	B							
Acetonitrile (Methyl Cyanide) CH ₃ CN		A	C	A		X		A		A	A	A	A	B ^{100°}		A	A	A		
Acetophenone (Phenyl Methyl Ketone) C ₆ H ₅ COCH ₃	X	X	X	A		X		A		B	B	A	A	B	A ^{70°}		A	A	A	
Acetyl Acetone (2,4-Pentanedione) CH ₃ COCH ₂ COCH ₃	B	X	X	A		X		A		B	X	B	B							
Acetyl Chloride CH ₃ COCl		X	X	C	X	B		A		B	X	A	B	A	X		A	X	A	
Acetylene (Ethyne) HC≡CH		C	A	A	A	A	A	A	A	C	A	A	A	A	X	A	A	B	A	
Acetyl Salicylic Acid (Aspirin) (CH ₃ OCO) • C ₆ H ₄ COOH		X		B				A		A	X	B	B							A ^{140°}
Acetylene Tetrabromide (Tetra Bromoethane) (CHBr ₂) ₂		X	X			A		A		X	X	A								
Acrolein (Acrylaldehyde) H ₂ C = CHCHO			B			A		A		A	B	B	B							
Acrylonitrile (Vinyl Cyanide) CH ₂ =CHCN		X	X	X		X		A	A	B	A	A	A	A	B		A	A		
Adipic Acid (1,4-Butanedicarboxylic Acid)		X	B			A		A		B	B	B	B	A	A		A	A		A ^{140°}
Allyl Alcohol (2-Propen-1-ol) CH ₂ CHCH ₂ OH		A	A	A		B		A		B	A	A	A				A			A
Alcohols R-OH					B									A	A	A	A	A	A	A
Amyl (1-Pentanol) C ₄ H ₉ CH ₂ OH		B	B			B		A		A	B		A	A	B	A	A	A	A	A
Benzyl (Phenylcarbinol) C ₆ H ₅ CH ₂ OH		B	X			A		A		A	B		A	A	A		A			A ^{140°}
Butyl (Butanol) C ₃ H ₇ CH ₂ OH		A	A			A		A		A	B		A	A	B	A	A	B	A	A ^{140°}

RATING KEY: (A) Excellent (B) Good (C) Fair to Poor (X) Not Recommended □ No Data Available

CHEMICAL Formula	ELASTOMERS									METAL PARTS				PLASTICS						
	RUPPLON™ (Polyurethane)	NEOPRENE	NITRILE	E.P.D.M.	HYTREL®	(FKM) FLUOROCARBON	BLUE GYLON®	PTFE, PFA	ENVELON®	SANTOPRENE®	ALUMINUM	CAST IRON/STEEL	STAINLESS STEEL	Alloy C (Hastelloy Equiv.)	POLYPROPYLENE	ACETAL	PVDF	NYLON	RYTON®	UHMW POLYETHYLENE
Diacetone (Tyranton) (CH ₃) ₂ C(OH) CH ₂ COCH ₃	C	X	X	B		X	A		C	A	A	A	A	X	A	A	A			
Ethyl (Ethanol) CH ₃ CH ₂ OH	X	A	A		X	B	A		B	B	B	A	A	A ^{100°}		A	X	A		A ^{140°}
Hexyl (1-Hexanol) C ₅ H ₁₁ CH ₂ OH		B	A			A	A		B	A		A	A	A ^{70°}		A				A ^{140°}
Isobutyl (2-Methyl-1-Propanol) C ₃ H ₇ CH ₂ OH	X	A	C			A	A		A	B		A	A			A				A ^{140°}
Isopropyl (2-Propanol) H ₃ CCH(OH)CH ₃		B	C			A	A		B	B	C	A	A	A		A ^{150°}				A ^{140°}
Methyl (Methanol) CH ₃ OH		A	A	X		X	A		A	B	A	A	A	A ^{120°}		A				A ^{140°}
Octyl (Caprylic Alcohol) C ₇ H ₁₅ • CH ₂ OH		B	B			A	A		B	A		A	A							
Propyl (Propanol) C ₂ H ₅ CH ₂ OH		A	A			A	A		A	A		A	A	A		A ^{120°}				A ^{140°}
Allyl Bromide (3-Bromopropene) H ₂ C=CHCH ₂ Br		X	X	X		B	A			X	A									
Allyl Chloride (3-Chloropropene) CH ₂ =CHCH ₂ Cl		X	X	X		B	A			X	C	B		A ^{70°}		A				B
Alkazene® (Chlorethyl or Polyisopropyl benzenes)		X	X			A	A		X											
Almond Oil (Artificial)	X	X	X	B		X	A													
Alum (Aluminum Potassium Sulfate Dodecahydrate) KAl(SO ₄) ₂ • 12H ₂ O		A	A	A		X	A	A	A			B	B	A		A	C			A ^{140°}
Aluminum Acetate (Burow's Solution)		C	C	A		X	A		A		B	C	A	A	A ^{100°}		A			A ^{140°}
Aluminum Bromide AlBr ₃		A	A				A									A				
Aluminum Chloride AlCl ₃	B	A	A	A	B	A	A	A	20%A	X	C	B	25%A	A	B	A	B	A		
Aluminum Fluoride AlF ₃		A	A	B		A	X	A	A	50%A	C	C	20%A	A	X	A	A	A		A ^{140°}
Aluminum Hydroxide (Alumina Trihydrate) Al(OH) ₃		A	B	A		C	A	A	A	10%B	30%B	B	10%B	A		A	A			A ^{140°}
Aluminum Nitrate Al(NO ₃) ₃ • 9H ₂ O		A	A	A		A	A	A	A	X		0%A	0%B	A		A	B			A ^{140°}
Aluminum Phosphate AlPO ₄		A	A	A		A	A		A											
Aluminum Potassium Sulfate (Potash Alum) KAl(SO ₄) ₂		A	A	A		A	A		A	10%A	X	A	B	A	A	A	X			A ^{140°}
Aluminum Sodium Sulfate (Soda Alum) NaAl(SO ₄) ₂	A	A	A	A		A	A													

Data limited to % concentration and/or temperature °F shown. Where not shown temperature is 70°F (21°C) Ambient.

CHEMICAL Formula	ELASTOMERS										METAL PARTS				PLASTICS					
	RUPPLON™ (Polyurethane)	NEOPRENE	NITRILE	E.P.D.M.	HYTREL®	(FKM) FLUOROCARBON	BLUE GYLON®	PTFE, PFA	ENVELON®	SANTOPRENE®	ALUMINUM	CAST IRON/STEEL	STAINLESS STEEL	Alloy C (Hastelloy Equiv.)	POLYPROPYLENE	ACETAL	PVDF	NYLON	RYTON®	UHMW POLYETHYLENE
Aluminum Sulfate (Cake Alum) $Al_2(SO_4)_3$	A	A	A	A	B	A	A	A	A	A	30%B	X	50%A ^{167*}	90%A ^{212*}	A	B	A	A	A	A ^{120*}
Amines $R-NH_2$		B	X		A ^{70*}	X			A	A	A		A		B	C		A	A	
Ammonia Anhydrous, Liquid NH_3	X	B	B	A	X	X		A	A	A	A	A	A	A	A	X	A	A	A	A
Ammonia Gas — Cold		A	A			A		A	A	A										A
Ammonia Gas — Hot		B	C			X		A	A	A										A ^{140*}
Ammonia Liquors		A				X		A	A	A	A	A	A							
Ammonium Nitrate NH_4NO_3		B	A	A	B	A	A	A	A	A	B	B	A	A	A	B	A	C		A ^{140*}
Ammonium Cupric Sulfate $(NH_4)_2Cu(SO_4)_2$			A			A		A												
Ammonium Acetate $CH_3CO_2NH_4$		A				A		A	A	A	50%B	50%A								A
Ammonium Bicarbonate NH_4HCO_3		A	A	A		A		A	B	B	B	90%B								A ^{140*}
Ammonium Bifluoride — 10% NH_4HF_2		X	B					A	A	C	X	B	B		A		A			
Ammonium Carbonate $(NH_4)_2CO_3$		B	X	A		A		A	A	B	B	70%B ^{212*}	70%B ^{212*}		A		A	A	A	A
Ammonium Casenite		A							A			A								
Ammonium Chloride (Sal Ammoniac) NH_4Cl	A	A	A	A	A	A	A	A	A	A	X	X	B	A	A	X	A	B	A	A ^{140*}
Ammonium Dichromate $(NH_4)_2Cr_2O_7$		A	A	A				A	A	A	A	30%A								
Ammonium Fluoride NH_4F		B	B			20%A		A			10%B	20%B	B	40%A	B		A	A		A ^{140*}
Ammonium Hydroxide (Aqua Ammonia) NH_4OH	A	B	B	A		B	A	A	A	A	30%A	30%B	50%A	80%A	A	B	A	C	A	A ^{140*}
Ammonium Metaphosphate		A	A	A		A		A			90%B	B	B	A	A		A			A ^{140*}
Ammonium Nitrite NH_4NO_2		A	A					A	A	A					70%A		A			
Ammonium Oxalate $(NH_4OOC)_2$		A	A						A				A	A						A ^{140*}
Ammonium Persulfate $(NH_4)_2S_2O_8$	X	A	C	B		A		A	A	C	X	A			A		A	X		A ^{140*}
Ammonium Phosphate, Monobasic $(NH_4)H_2PO_4$		A	A	A	B	A	A	A	A	A	X	X	B	5%A	A		A			A ^{140*}
Ammonium Phosphate, Di-Basic $(NH_4)_2HPO_4$		A	A			A	A	A	A	A	B		A	A	A	B	A	C	A	
Ammonium Phosphate, Tri-Basic $(NH_4)_3PO_4 \cdot 3H_2O$		A	A			A	A	A	A	A	X		B	B	A		A			
Ammonium Sulfate $(NH_4)_2SO_4$	A	A	A	A	C	A	A	A	A	A	X	B	80%A ^{212*}	40%B	A	B	A	B	A	A ^{120*}
Ammonium Sulfide $(NH_4)_2S$		A	A			A		A			B		B	10%A						A ^{140*}

RATING KEY: (A) Excellent (B) Good (C) Fair to Poor (X) Not Recommended □ No Data Available

CHEMICAL Formula	ELASTOMERS									METAL PARTS				PLASTICS							
	RUPPLON™ (Polyurethane)	NEOPRENE	NITRILE	E.P.D.M.	HYTREL®	(FKM) FLUOROCARBON	BLUE GYLON®	PTFE, PFA	ENVELON®	SANTOPRENE®	ALUMINUM	CAST IRON/STEEL	STAINLESS STEEL	Alloy C (Hastelloy Equiv.)	POLYPROPYLENE	ACETAL	PVDF	NYLON	RYTON®	UHMW POLYETHYLENE	
Ammonium Sulfite (NH ₄) ₂ SO ₃ ·H ₂ O			A			A	A				C	X	B	A ^{212°}	A	X		A			
Ammonium Thiocyanate NH ₄ SCN		A	A	A		A	A				C	C	50%A	50%A						A ^{140°}	
Ammonium Thiosulfate (NH ₄) ₂ S ₂ O ₃		A	A	A		A	A		A	40%A	X	10%A									
Amyl Acetate (Banana Oil) CH ₃ CO ₂ C ₅ H ₁₁	X	X	X	A	C	X	A	A	A	B	A	B	A	B	X	X	A ^{120°}	C	A	B	
Amyl Alcohol (Pentyl Alcohol) CH ₃ (CH ₂) ₄ OH	X	A	B	A	A	A	A	A	A	B	A	A	A	B	A		A			A ^{140°}	
n-Amyl Amine (1-Aminopentane) CH ₃ (CH ₂) ₄ NH ₂		X	C	X		X		A													
Amyl Borate C ₅ H ₁₁ BO ₃		B	A			A		A		B											
Amyl Chloride (Chloropentane) CH ₃ (CH ₂) ₄ Cl		X	X	X		A		A		C	X	A	A	B	X	A	A	C		C	
Amyl Chloronaphthalene		X	B			A		A		C											
Amyl Naphthalene C ₁₅ H ₁₈		X	X	X		A		A		C											
Amyl Phenol C ₆ H ₄ (OH)C ₅ H ₁₁			X			A		A			A	A	A	A							
Aniline (Aniline Oil) (Amino Benzene) C ₆ H ₅ NH ₂	X	X	X	C	X	B	A	A	A	B	B	A	A	B	A	A	A	A	A	A	B ^{122°}
Aniline Dyes	X	C	C	C		B	A	A	A	B	B	C	B								
Aniline Hydrochloride C ₆ H ₅ NH ₂ ·HCl		X	C			B		A		A	X	X	X		X		A	X		C ^{140°}	
Animal Fats & Oils	A	C	A	B	B	A		A		C	A	X	A	A			A				
Animal Gelatin	A	A	A	A		A		A					A								
Anisole (Methylphenyl Ether) C ₆ H ₅ OCH ₃		X				X		A			B	B	B	B							C ^{140°}
Ansul Ether		X	C			X		A		X											
Anthraquinone C ₁₄ H ₈ O ₂								A			B	B	B	A							
Anti-Freeze (Alcohol Base)	X	A	A	A		A		A			A	A	A	A							
Anti-Freeze (Glycol Base) (Prestone® Etc.)	B	B	A	A		A		A		A	A	A	A	A							
Antimony Pentachloride SbCl ₅			X					A			A	A	A	A							A ^{140°}
Antimony Trichloride SbCl ₃			B	A		A		A			B	A	A	B	A		A	X		A	
Aqua Regia (Nitric & Hydrochloric Acid)	X	X	X	X		B	X	A	A	X	X	X	X	C	C	X	A	X	X	X	B
Aroclor® PCB mixtures		X	C	X		A		A			A	B	A	90%A	X			A			
Aromatic Hydrocarbons C ₆ H ₅ R		X	X		C	A		A		C	A	A	A								
Aromatic Solvents (Benzene Etc.)	X	X	C	X		B		A			A	B	A	B							

Data limited to % concentration and/or temperature °F shown. Where not shown temperature is 70°F (21°C) Ambient.

CHEMICAL Formula	ELASTOMERS										METAL PARTS				PLASTICS				
	RUPPLON™ (Polyurethane)	NEOPRENE	NITRILE	E.P.D.M.	HYTREL®	(FKM) FLUOROCARBON	BLUE GYLON®	PTFE, PFA	ENVELON®	SANTOPRENE®	ALUMINUM	CAST IRON/STEEL	STAINLESS STEEL	Alloy C (Hastelloy Equiv.)	POLYPROPYLENE	ACETAL	PVDF	NYLON	RYTON®
Arsenic Acid AsH ₃ O ₄	X	A	B	A		A	A		A	A	X	B	B	A		A	X	A	
Arsenic Trichloride (Arsenic Butter) AsCl ₃		A	C	X		X	A		B	B	B	X	B						A ^{140°}
Ascorbic Acid C ₆ H ₈ O ₆						A	A			A	X	A							
Askarel® (Pyranol®) PCB mixtures	X	X	B	X		C	A		X			A							
Asphalt Hydrocarbons	B	C	B	X	B	A	A	A	B	A	B	A		A	B	A	A		
Asphalt Topping Hydrocarbons		A	C		B	C	A				A	A							
ASTM — Ref Motor Fuel A (Aliphatic) Hydrocarbons	A	B	A	X	A	A	A			A	A	A	A						
ASTM — Ref Motor Fuel B (30% Aromatic) Hydrocarbons	B	X	A	X	A	A	A			A	A	A	A						
ASTM — Ref Motor Fuel C (50% Aromatic) Hydrocarbons	X	X	B	X	C	A	A			A	A	A	A						
ASTM — Ref #1 Oil (High Aniline) Hydrocarbons	A	B	A	X	A	A	A		A	A	A	A	A						
ASTM — Ref #2 Oil (Medium Aniline) Hydrocarbons	B	B	A	X	A	A	A		A	A	A	A	A						
ASTM — Ref #3 Oil (Low Aniline) Hydrocarbons	B	C	A	X	A	A	A		B	A	A	A	A						
ASTM — Ref #4 Oil (High Aniline) Hydrocarbons	X	X	B	X		A	A			A	A	A	A						
Aviation Gasoline Hydrocarbons		C	A	X		A	A			A	A	A	A						
Barbeque Sauce Water, oils, spices		A	A				A				X	A							
Barium Carbonate BaCO ₃		A	A	A		A	A		A	X	B	B	B	A		A	A	A	A ^{140°}
Barium Chloride Dihydrate BaCl ₂ • 2H ₂ O	A	A	A	A		A	A	A		^{50%} B	B	^{B^{212°}}	B		A	A	A	B	A
Barium Cyanide Ba(CN) ₂		A	C		X	A			A			A		X			A		
Barium Hydroxide (Barium Hydrate) Ba(OH) ₂	A	A	A	A	B	A	A	A	A	X	B	^{50% A^{122°}}	B	A		A	A	A	A ^{140°}
Barium Nitrate Ba(NO ₃) ₂		A	A				A		A	B	A	A	A	A	B	A	A		
Barium Sulfate (Blanc Fixe) BaSO ₄	A	A	A	A	X	A	A		A	B	B	B		A	B	A	A	A	A
Barium Sulfide BaS	A	A	A	A		A	A	A	A	X		B	A	A		A	A	A	A ^{120°}
Beef Extract		A	A			A	A				X	A							
Beer Water, carbonate	X	A	C	A	B	A	A	A	A	A	X	A	A	^{A^{75°}}	A	^{A^{175°}}	A	A	A ^{140°}
Beet Sugar Liquors (Sucrose)	X	A	A	A		A	A		A	A	B	A		A	B	A	A		

RATING KEY: (A) Excellent (B) Good (C) Fair to Poor (X) Not Recommended □ No Data Available

CHEMICAL Formula	ELASTOMERS									METAL PARTS				PLASTICS						
	RUPPLON™ (Polyurethane)	NEOPRENE	NITRILE	E.P.D.M.	HYTREL®	(FKM) FLUOROCARBON	BLUE GYLON®	PTFE, PFA	ENVELON®	SANTOPRENE®	ALUMINUM	CAST IRON/STEEL	STAINLESS STEEL	Alloy C (Hastelloy Equiv.)	POLYPROPYLENE	ACETAL	PVDF	NYLON	RYTON®	UHMW POLYETHYLENE
Benzaldehyde C ₆ H ₅ CHO	X	X	X	B	B	X		A	A	B	A	A	A	A	X		A	X	A	C
Benzene (Benzol) C ₆ H ₆	X	X	X	X	C ^{70°}	B	A	A	A	C	B	B	A ^{167°}	B	X	A	B	A	A	C
Benzene Sulfonic Acid C ₆ H ₅ SO ₃ H		A	C	C		A		A			C	A	A	90%A	X		B ^{100°}	X	A	A
Benzoic Acid (Benzene Carboxylic Acid) C ₆ H ₅ COOH		B	X	B		A		A			B	X	B	70%A	X	B	A	X	A	A ^{140°}
Benzoyl Chloride C ₆ H ₅ COCl	X	X	X	X		B		A	A		X	A	B	B			A			
Benzyl Acetate CH ₃ CO ₂ • H ₂ C ₆ H ₅			X			X		A			A	A	A	B						
Benzyl Alcohol C ₆ H ₅ CH ₂ OH		C	X	C		A		A	A		A	A	A	B	A		A	X	A	A ^{140°}
Benzyl Benzoate C ₆ H ₅ CO ₂ CH ₂ C ₆ H ₅		X	X	B		A		A		C	A	B	B	B						
Benzyl Chloride (Chlorotoluene) C ₆ H ₅ CH ₂ Cl	X	X	X	X		A		A		C	X	A	B	A	X	A	A	A	A	
Benzyl Dichloride (Benzal Chloride) C ₆ H ₅ CHCl ₂				X				A			X	B	A	B						
Biphenyl (Diphenyl) C ₆ H ₅ C ₆ H ₅		X	X	X		A		A			A	A								
Bismuth Subcarbonate (Bismuth Carbonate) (BiO) ₂ CO ₃		A	A	A		A		A					10%B							A ^{140°}
Black Sulfate Liquor	X	A	B	A	B	A	A	A	A		C	B	A	B						A ^{140°}
Blast Furnace Gas CO, H ₂ , CH ₄ , CO ₂ , N ₂		A	C		B	A		A	A	A										
Bleach Solutions Water, chlorine, oxygen		X	X	A	C	B		A	A	B	X		B	A ^{125°}	X					A ^{140°}
Borax (Sodium Borate) B ₄ Na ₂ O ₇	A	A	B	A	A	A	A	A	A	A	B	B	A	A	A	B	A	A	A	A ^{140°}
Bordeaux Mixture Copper sulfate salts		A	A	A	B	B		A		A			A	A						
Boric Acid (Boracic Acid) H ₃ BO ₃	A	A	A	A	A	A	A	A	A	A	A	X	30%A	80%A ^{167°}	A	C	A	B	A	A ^{120°}
Brake Fluid (Non-Petroleum Base) Silicones or glycols		A	X	A				A		A	A	A	A	A	X			B		
Brewery Slop		A	A			A		A		A		A	A							
Brine (Sodium Chloride) Salt water	A	B	A	A	B	A		A	A			X	A	A	A		A			A ^{140°}
Bromine — Anhydrous Br ₂	X	X	X	C	X	A	X	A		C	B	C	X	A	X		A ^{150°}			X
Bromine Trifluoride BrF ₃	X	X	X	X		X	X	A	C	C	A		B		X					
Bromine Water		B	X	X		B		A		B	X	X	X	A	X		A			C

Data limited to % concentration and/or temperature °F shown. Where not shown temperature is 70°F (21°C) Ambient.

CHEMICAL Formula	ELASTOMERS										METAL PARTS				PLASTICS					
	RUPPLON™ (Polyurethane)	NEOPRENE	NITRILE	E.P.D.M.	HYTREL®	(FKM) FLUOROCARBON	BLUE GYLON®	PTFE, PFA	ENVELON®	SANTOPRENE®	ALUMINUM	CAST IRON/STEEL	STAINLESS STEEL	Alloy C (Hastelloy Equiv.)	POLYPROPYLENE	ACETAL	PVDF	NYLON	RYTON®	UHMW POLYETHYLENE
Bromobenzene C ₆ H ₅ Br	X	X	X	X		B	A		X	X	B	A	B	X						
Bromochloromethane BrCH ₂ Cl		X	X	B		C	A			X	B	B	B							
Bromotoluene C ₆ H ₄ BrCH ₃			X			B	A			X	A	A	A							
Bronzing Liquid	X	X	X	B		X	A		A				A	A						
Bunker Oil (Fuel) #5, #6 & C Hydrocarbons	C	B	A	X		A	A		B	A	A	A	A							
Butadiene C ₄ H ₆	X	C	X	C		C	A	A	C	A	A	A		X		A	A	A	C	
Butane (LPG) (Butyl Hydride) C ₄ H ₁₀	B	B	A	X	A	A	A	A	C	A	A	A	A	X	B	A	A	A	A	A ^{140°}
Butter Fats	A	C	A	A	B	A	A		B	A	X	A								A ^{140°}
Buttermilk Fats, water		A	A			A			A	A		A		A		A	B			
Butyl Acetate CH ₃ CO ₂ (CH ₂) ₃ CH ₃	C	X	X	B	C	X	A	A	A	B	A	A	A	X	B	A ^{100°}	A	A	B	
n-Butyl Acetate CH ₃ CO ₂ (CH ₂) ₃ CH ₃		X	X	X		X	A		A	A	A	A	A							
Butyl Acetyl Ricinoleate C ₂₄ H ₄₄ O ₅		X	C	C		B	A		B				A							
Butyl Acrylate CH ₂ CHCO ₂ C ₄ H ₉		X	X	X		X	A		C							C				
Butyl Alcohol (Butanol) CH ₃ (CH ₂) ₃ OH	X	A	A	B	B	A	A	A	A	A	B	A	A	A		A				
Butyl Amine (Aminobutane) CH ₃ (CH ₂) ₂ CH ₂ NH ₂	X	X	B	X		X	A	A	A	A	A	A		X	C	B ^{70°}	A	A		
Butyl Benzoate C ₆ H ₅ COO • (CH ₂) ₃ CH ₃		X		B		A	A		C	B	B	B	B							
Butyl Bromide CH ₃ (CH ₂) ₂ CH ₂ Br			X			B	A									A				
Butyl Butyrate CH ₃ (CH ₂) ₂ • CH ₂ CO ₂ C ₄ H ₉			X			X	A			A	A	A	A							
Butyl Carbitol® CH ₃ (CH ₂) ₃ OCH ₂ CH ₂ OCH ₂ CH ₂ OH		B	A	A		A	A		B											
Butyl Cellosolve® HOCH ₂ CH ₂ OC ₄ H ₉		C	B			C	A		A							B				
Butyl Chloride (Chlorobutane) CH ₃ (CH ₂) ₃ Cl			X			A	A			X	B	B	B	X		A	A			
Butyl Ether (Dibutyl Ether) (CH ₃ (CH ₂) ₃) ₂ O		B	A			C	A			A	B	A	A	X		A ^{100°}	A	A		
Butyl Oleate C ₂₂ H ₄₂ O ₂		X		C		A	A		C											
Butyl Stearate CH ₃ (CH ₂) ₁₆ CO ₂ (CH ₂) ₃ CH ₃		X	A	C		B	A		C	B	B	B	B			A				
Butylene (Butene) C ₄ H ₈	X	X	B	X		B	A		X	A		A		X		A	B	A		

RATING KEY: (A) Excellent (B) Good (C) Fair to Poor (X) Not Recommended □ No Data Available

CHEMICAL Formula	ELASTOMERS									METAL PARTS				PLASTICS							
	RUPPLON™ (Polyurethane)	NEOPRENE	NITRILE	E.P.D.M.	HYTREL®	(FKM) FLUOROCARBON	BLUE GYLON®	PTFE, PFA	ENVELON®	SANTOPRENE®	ALUMINIUM	CAST IRON/STEEL	STAINLESS STEEL	Alloy C (Hastelloy Equiv.)	POLYPROPYLENE	ACETAL	PVDF	NYLON	RYTON®	UHMW POLYETHYLENE	
Butyraldehyde CH ₃ (CH ₂) ₂ CHO	C	X	X	C		X		A		C	A	A	A	A							C
Butyric Acid CH ₃ (CH ₂) ₂ CO ₂ H		X	C	C	B	C		A		A	A	X	B	A	A	X	A	C	A		B
Butyronitrile CH ₃ CH ₂ CH ₂ CN		X	X	A				A													
Calcium Acetate Hydrate Ca(CH ₃ COO) ₂ • H ₂ O		C	B	A		X		A			C	C	B	B							
Calcium Bisulfite Ca(HSO ₃) ₂	A	A	A	X	X	A	A	A			X	X	90%A	A		A	X	A	B		A
Calcium Carbonate (Chalk) CaCO ₃		A	A	A		A		A			C	B	B	B	A	A	A	A			A
Calcium Chlorate Ca(ClO ₃) ₂		A	A	A		A		A			30%B	B	0%B	70%B	A		A				A ^{140°}
Calcium Chloride (Brine) CaCl ₂ • 6H ₂ O	A	A	A	A	A	A	A	A	A		A	A	A	A	A	X	A	B	A		A ^{140°}
Calcium Hydrosulfide (Calcium Sulfhydrate) Ca(HS) ₂ • 6H ₂ O						A		A													A ^{140°}
Calcium Hydroxide (Slaked Lime) Ca(OH) ₂	A	A	A	A	B	A	A	A	A		X	B	50%B	50%A	A	X	A	B			
Calcium Hypochlorite 20% (Calcium Oxichloride) Ca(ClO) ₂	X	X	C	B	5%A	B	A	A	A		X	X	B	B ^{125°}	A	A	A	A	A		A ^{120°}
Calcium Nitrate Ca(NO ₃) ₂	A	A	A	A		A		A	A		40%B ^{212°}	30%B ^{212°}	50%B ^{212°}	10%B	A	X	A	A	A		A ^{140°}
Calcium Oxide (Unslaked Lime) • CaO		A	A	A	B			A			A	A	A	A							A ^{140°}
Calcium Silicate Ca ₂ SiO ₄			A			A		A			A	B	A	A							
Calcium Sulfate (Gypsum) CaSO ₄	B	A	A	A		A		A			A	C	10%B	10%A	A	A	X	A	X		A ^{140°}
Calcium Sulfide CaS	A	B	A	A		A		A			20%A	B	B	A	A ^{120°}		A				
Calcium Sulfite CaSO ₃ • 2H ₂ O			A			A		A			10%B	B	10%A								
Calgon® (NaPO ₃) ₆		A	A			A			A			X	A		A						
Cane Juice, Sucrose, water		A	A						A		B	A	A		X						
Cane Sugar Liquors Sucrose, water	X	A	A	A	B	A	A	A	A		A	A	A		A		A				
Capryl Alcohol (Octanol) CH ₃ (CH ₂) ₆ CH ₂ OH	X	B	A	C		B		A			A	A	A	A							
Caprylic Acid (Octanoic Acid) CH ₃ (CH ₂) ₆ COOH			C					A			A		A	A			A				
Carbamate H ₂ NCO ₂ R	X	C	C	C		A		A		A											
Carbitol® CH ₃ CH ₂ OCH ₂ CH ₂ OCH ₂ CH ₂ OH	X	C	B	C		C		A		B	A	A	A	A							

Data limited to % concentration and/or temperature °F shown. Where not shown temperature is 70°F (21°C) Ambient.

CHEMICAL Formula	ELASTOMERS									METAL PARTS				PLASTICS						
	RUPPLON™ (Polyurethane)	NEOPRENE	NITRILE	E.P.D.M.	HYTREL®	(FKM) FLUOROCARBON	BLUE GYLON®	PTFE, PFA	ENVELON®	SANTOPRENE®	ALUMINUM	CAST IRON/STEEL	STAINLESS STEEL	Alloy C (Hastelloy Equiv.)	POLYPROPYLENE	ACETAL	PVDF	NYLON	RYTON®	UHMW POLYETHYLENE
Carbolic Acid (see Phenol) C ₆ H ₅ OH	X	C	X	C		A		A	A	A	B	A	B	A	C	X	A ^{150°}	X	A	A
Carbon Dioxide (Carbonic Acid Gas) CO ₂	A	A	A	B	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	C
Carbon Disulfide (Carbon Bisulfide) CS ₂	C	X	X	X	C	A	A	A	A	X	A	B	^{90%} A		X	B	A	B	A	X
Carbon Monoxide CO	A	A	C	C	A	C	X	A	A	A	A	A	A	A	A	B	A	A		A ^{140°}
Carbon Tetrachloride (Tetrachloromethane) CCl ₄	X	X	C	X	X	A	X	A	A	X	X	C	B	A	X	B	A	B	A	X
Carbonated Beverages CO ₂ /H ₂ O	A	A	A					A		A	C		A	A	A		A			
Carbonic Acid (liquid) H ₂ CO ₃		A	B		C	A		A	A	A	A	X	B	A	A	A	A	A	A	A
Casein a phosphoprotein		A	A	A		A		A			B		B	B						
Castor Oil a mixture of fatty acids	A	A	A	B	B	A	A	A	A	B	A	B	A	A						A ^{140°}
Catsup (Ketchup)		C	A			A		A		A	B	X	A	A	A					A ^{140°}
Cellosolve® (Glycol Ethers) HOCH ₂ CH ₂ OR		C	C	C	X	B		A		C	A		A	A	A ^{100°}	A	A	A	A	
Cellulose Acetate C ₈ H ₁₂ O ₅		B	B			C		A			B	B	A	A						
Cellulube® Hydraulic Fluids (Phosphate Esters)		X	X	A	C	B		A		X	A	A	A	A						
Chlorinated Lime—35% Bleach CA(ClO) ₂	X	X	C	A	^{6%} A	A		A		X		X	A							
Chlorinated Water		C	C		X	A		A			C		B	A	B	X	A	B	X	A
Chlorine, Dry Cl ₂		C	C		X	A		A	A	C	X	X			X	X	A	X	X	B
Chlorine, Wet Cl ₂ /H ₂ O	X	X	C	X	X	A	A	A	A	C	B	C	A	A	X	X	A	X	X	B
Chlorine, Anhydrous Liquid Cl ₂		X	X			A		A		X	X	X	X	A	X		A			X
Chlorine Dioxide ClO ₂		X	X	C		B	A	A	A	X	B		X	B	X		A			
Chlorine Trifluoride ClF ₃	X	X	X	X		B	X	A	C	X	A		A		X			X		B
Chloroacetic Acid (Monochloroacetic Acid) ClCH ₂ COOH	X	C	X	B	X	C	A	A			X	X	X	A	A	X	A	X	A	
Chloroacetone (Monochloroacetone) ClCH ₂ COCH ₃		C	X	A		C		A		C	X	B	B	B	X					
Chlorobenzene (Monochlorobenzene) C ₆ H ₅ Cl	X	X	X	X	X	A		A		C	X	B	B	B	X	A	A ^{150°}	B	A	X

RATING KEY: (A) Excellent (B) Good (C) Fair to Poor (X) Not Recommended □ No Data Available

CHEMICAL Formula	ELASTOMERS									METAL PARTS				PLASTICS						
	RUPPLON™ (Polyurethane)	NEOPRENE	NITRILE	E.P.D.M.	HYTREL®	(FKM) FLUOROCARBON	BLUE GYLON®	PTFE, PFA	ENVELON®	SANTOPRENE®	ALUMINUM	CAST IRON/STEEL	STAINLESS STEEL	Alloy C (Hastelloy Equiv.)	POLYPROPYLENE	ACETAL	PVDF	NYLON	RYTON®	UHMW POLYETHYLENE
Chlorobutadiene (Chloroprene) C ₄ H ₅ CL		X	X	X		A	A		C	X	B	B	B	X						
Chlorobromomethane ClCH ₂ Br		X	X			A	A		X	X	B	B		X						X
Chloroform CHCl ₃	X	X	X	X	X	A	A	A	X	X	A	A	A	X	B	A	X	A		
1-Chloronaphthalene C ₁₀ H ₇ Cl		X	X	X		C	A		X	X	B	B	A	X						
Chlorosulfonic Acid HSO ₃ CL	X	X	X	X	X	X	A	A		A	B	B	B	A	X	X	X	X	X	
o-Chlorophenol C ₆ H ₅ ClO		X	X	X		B	A			B	B	B	B		B	A	X	A		
Chlorothene® (Chlorinated Solvents) CH ₂ CCl ₃		X	X			C	A	A	A	X	X	A	A							
Chlorotrifluoroethylene C ₂ H ₂ ClF ₃			X					A			B	B	B	B						
Chlorox®		B	C			A		A	B		X	A	B	B						
Chocolate Syrup Corn syrup, water, sugar		A	A					A	A		X	A		A						
Chromic Acid — To 10% H ₂ CrO ₄		X	X	A	X	A		A	A	X	10%B	B	X	B	X	X	A ^{120°}	X	A	A ^{140°}
Chromic Acid — 25%-50% H ₂ CrO ₄	X	X	X	C	X	A		A	A	X	X	B	X	B	A	X	A ^{120°}	X	A	A ^{122°}
Chromic Acid — Over 50% H ₂ CrO ₄	X	X	X	C	X	A		A	A	X	X	B	X	B	X	X	A ^{120°}	X	A	A ^{122°}
Cider (Apple Juice) Sucrose, water		A	A		B	A		A	A	B	X	A	A							A ^{140°}
Cinnamon Oil Cinnamic acid esters		C						A	C		X	A								
Citric Acid C ₆ H ₈ O ₇ • H ₂ O	A	A	B	A	A	A	A	A	A	B	X	30%A	A	B	B	A ^{250°}	X	A	A	A ^{140°}
Citric Oils Citric acid esters		X	C	B		A		A	C		X	A		A						
Citrus Pectin Liquor		A	A			A		A				A								
Clove Oil (Eugenol) C ₁₀ H ₁₂ O ₂		C						A	C		X	A								A
Cobalt Chloride CoCl ₂ • 6H ₂ O	X	A	A	C		A		A	A	X				A						
Coconut Oil (Coconut Butter) Fatty acid mixture	A	B	B	A		A		A	B	B	A	A								
Cod Liver Oil (Fish Oil) Glycerides, acids, esters	A	B	B	A		A		A	C	A	X	A								A ^{140°}
Coffee Fatty oils, acids, cellulose, water		A	A					A	A	A		A	A	A						A ^{140°}
Coke Oven Gas H ₂ (53%),CH ₄ (26%) N ₂ (11%),CO(7%)& hydrocarbons (3%)		C	C			A		A	A	B						A				

Data limited to % concentration and/or temperature °F shown. Where not shown temperature is 70°F (21°C) Ambient.

CHEMICAL Formula	ELASTOMERS										METAL PARTS				PLASTICS						
	RUPPLON™ (Polyurethane)	NEOPRENE	NITRILE	E.P.D.M.	HYTREL®	(FKM) FLUOROCARBON	BLUE GYLON®	PTFE, PFA	ENVELON®	SANTOPRENE®	ALUMINUM	CAST IRON/STEEL	STAINLESS STEEL	Alloy C (Hastelloy Equiv.)	POLYPROPYLENE	ACETAL	PVDF	NYLON	RYTON®	UHMW POLYETHYLENE	
Copper Acetate Cu(C ₂ H ₃ O ₂) ₂ • CuO • 6H ₂ O		C	B	A				A		A	X	90%A	10%B	10%B						A	
Copper Chloride CuCl ₂ • 2H ₂ O	A	A	A	A	A	A	A	A	A	A	X	X	X	40%B	A					A	A ^{140°}
Copper Cyanide CuCN	A	A	A	A		A		A		A	X	A	10%A	A ^{170°}	A			A	A	A	A ^{140°}
Copper Fluoroborate			A	B			A				A	X	X	X	B						
Copper Nitrate Hexahydrate Cu(NO ₃) ₂ • 6H ₂ O		A	A	A		A		A			X	X	A	B	A	A	A	X	A		
Copper Sulfate (Blue Copperas) CuSO ₄ • 5H ₂ O	A	A	A	A	A	A	A	A	5%A		X	X	10%A	A	A	A	A	B	A	A	
Copper Sulfide CuS			A			A		A													
Corn Oil (Maize oil) Glycerides of fatty acids	A	C	A	C	A	A	A	A	A	B	B	C	B		A			A	A		A ^{140°}
Cotton Seed Oil		A	C	A	A	A	A	A	A	A	B	A	C	A		A	B	A	A	A	A
Cream			C	A			A		A	A	A		X	A		A					
Creosote, Coal-Tar (Tar Oil) Hydrocarbon mixture	B	C	A	X	X	A	A	A	A	B	B	B	B	B	X	X			X		X
Creosote, Wood-Tar Mixture of phenols		B	A	X	X	A	A	A	A				B		X	X			X		X
Cresylic Acid (Cresol) C ₈ H ₁₀ O ₂	X	X	C	X		A		A	A	B	B	C	A	B	X	X	A ^{150°}	X			A
Crotonaldehyde CH ₃ CHCHCHO		A	X			A		A			A	A	A	A							
Cumene (Isopropylbenzene) C ₆ H ₅ CH(CH ₃) ₂		X	X	X		A		A			B	B	B	B							
Cutting Oil (Water Soluble)		X	C			A		A			A	A	A	A							
Cutting Oil (Sulfur Base)		C	A					A			A	A	A	A							
Cyclohexane C ₆ H ₁₂	C	X	B	X	A	A		A	A	C	B	B	B	B	X	A	A	A	A	A	A
Cyclohexanol C ₆ H ₁₁ OH		A	B	X		A		A		B	C	B	A	A	B	A	A ^{150°}	A	A	A	A ^{140°}
Cyclohexanone C ₆ H ₁₀ O		X	X	C		X		A	A	C	B	B	B	B	X	A	A	A	A	A	B
Cyclopentane C ₅ H ₁₀		A	B	X		A		A			B	B	B	B							
Cymene (Isopropyltoluene) C ₁₀ H ₁₄		X	C	X		A		A													
Decahydronaphthalene (Decalin®) C ₁₀ H ₁₈	X	X	X	X		A		A													
Decanal CH ₃ (CH ₂) ₈ CHO				X	X	X		A													
Decane CH ₃ (CH ₂) ₈ CH ₃	C	X	B	C		A		A		C					A ^{70°}				A		
Decyl Alcohol (Decanol) C ₁₀ H ₂₁ OH		X	A			B		A													

RATING KEY: (A) Excellent (B) Good (C) Fair to Poor (X) Not Recommended □ No Data Available

CHEMICAL Formula	ELASTOMERS									METAL PARTS				PLASTICS							
	RUPPLON™ (Polyurethane)	NEOPRENE	NITRILE	E.P.D.M.	HYTREL®	(FKM) FLUOROCARBON	BLUE GYLON®	PTFE, PFA	ENVELON®	SANTOPRENE®	ALUMINUM	CAST IRON/STEEL	STAINLESS STEEL	Alloy C (Hastelloy Equiv.)	POLYPROPYLENE	ACETAL	PVDF	NYLON	RYTON®	UHMW POLYETHYLENE	
Denatured Alcohol Ethanol and denaturant	X	B	A	A		B		A		B	B	B	A	A	A		A				
Detergent Solutions	X	A	A	A	B	A		A		B	B		A		A	A		A	A	A	A ^{140°}
Developing Fluids & Solutions	X	A	A	C	X	A		A		A		X	A	A						A ^{140°}	
Dextrose C ₆ H ₁₂ O ₆	A	B	B	A	B ^{140°}	A		A			A	X	A	A	A		A				A ^{140°}
Diacetone Alcohol (Diacetone) (CH ₃) ₂ COHCH ₂ •COCH ₃	C	X	X	B	C	X		A		B	A	A	A	A	X	A	C	A			
Dibenzyl Ether (C ₆ H ₅ CH ₂) ₂ O	C	X	X	C		C		A		C	B	B	B	B			C				
Dibenzyl Sebecate C ₂₄ H ₃₀ O ₄	X	X	X	C	A	B		A	A	C											
Dibutyl Amine (C ₄ H ₉) ₂ NH		X	C	X		X		A		B		A	A	A	X		B ^{70°}				
Dibutyl Phthalate (DBP) C ₆ H ₄ (CO ₂ C ₄ H ₉) ₂	C	X	X	A	A	B		A	A	B	A	A	A	A	X		X	A	A	A	A
Dibutyl Sebecate (DBS) C ₁₈ H ₃₄ O ₄	X	X	X	C		C		A		B		A	A		C						
Dichloroacetic Acid Cl ₂ CHCOOH		X	X			X		A													
o-Dichlorobenzene C ₆ H ₄ Cl ₂	X	X	X	X	X	A		A		X	X	B	B	A	B		A ^{150°}			X	
Dichlorobutane C ₄ H ₈ Cl ₂			X			A		A			X	B	B								
Dichloroethyl Ether [ClCH ₂ CH ₂] ₂ O			X					A			B										
Dichloro Isopropyl Ether C ₆ H ₁₂ OCl ₂	C	X	X	X		X		A		X					X						
Dicyclohexylamine (C ₆ H ₁₁) ₂ NH		X	X	X		B		A		B											
Diesel Oil (Fuel ASTM #2) Hydrocarbons	C	C	A	X	B	A		A	A	C	A	A	A	A	B		A				A ^{122°}
Diester Synthetic Oils	X	X	B	X		A		A			A	A	A	A							
Diethano Amine (HOCH ₂ CH ₂) ₂ NH	C	A	B					A				A	A	A	A				A		
Diethyl Amine (CH ₃ CH ₂) ₂ NH	C	C	C	C		X		A			B	B	A	A	A		A	A			
Diethyl Benzene C ₆ H ₄ (C ₂ H ₅) ₂	X	X	X	X		A		A		C											
Diethyl Carbonate (C ₂ H ₅ O) ₂ CO		X	X					A	A			A									
Diethyl Ether (Ether) (CH ₃ CH ₂) ₂ O	A	C	B	X	C	X		A	A	B	B	A	A	A	X	A	A	B	A	A	X
Diethyl Phthalate (DEP) C ₆ H ₄ (CO ₂ C ₂ H ₅) ₂			X			C		A				A	A	A	A						
Diethyl Sebecate C ₁₄ H ₂₆ O ₄		X	X	C	A	B		A		B	A	A	A	A	A ^{120°}		A ^{120°}				
Diethylene Ether (Dioxane) C ₄ H ₈ O ₂		X	X	A		X		A			A	A	A								

Data limited to % concentration and/or temperature °F shown. Where not shown temperature is 70°F (21°C) Ambient.

CHEMICAL Formula	ELASTOMERS										METAL PARTS				PLASTICS					
	RUPPLON™ (Polyurethane)	NEOPRENE	NITRILE	E.P.D.M.	HYTREL®	(FKM) FLUOROCARBON	BLUE GYLON®	PTFE, PFA	ENVELON®	SANTOPRENE®	ALUMINUM	CAST IRON/STEEL	STAINLESS STEEL	Alloy C (Hastelloy Equiv.)	POLYPROPYLENE	ACETAL	PVDF	NYLON	RYTON®	UHMW POLYETHYLENE
Diethylene Glycol (DEG) HOCH ₂ CH ₂ OCH ₂ •CH ₂ OH	X	A	A	A	A	A	A		A	A	A	A	A	A				A		A ^{140°}
Diethylene Triamine (NH ₂ C ₂ H ₄) ₂ NH			B				A			A	A	A	A							
Diisobutyl Ketone C ₄ H ₉ COC ₄ H ₉		X	X	B		X	A			A	A	A	A							
Diisobutylene [HC=C(CH ₃) ₂] ₂		C	B			C	A		C					A		A	A	A		
Diisodecyl Adipate (DIDA) C ₂₆ H ₅₀ O ₄			X			C	A													
Diisodecyl Phthalate (DIDP) C ₂₆ H ₄₇ O ₄		X	X	A		C	A													
Diisooctyl Adipate (DIOA) C ₂₂ H ₄₂ O ₄			X			C	A			A	A	A	A							
Diisooctyl Phthalate (DIOP) C ₂₄ H ₃₉ O ₄			X			C	A													
Diisooctyl Sebecate (DIOS) C ₂₆ H ₄₆ O ₄				B		A	A													
Diisopropyl Amine [(CH ₃) ₂ CH] ₂ NH			B				A													
Diisopropyl Benzene C ₆ H ₄ •[CH(CH ₃) ₂] ₂		X	X	X		A	A		C											
Diisopropyl Ketone [(CH ₃) ₂ CH] ₂ CO		X	X	A		X	A		C			A								
N,N-Dimethylaniline C ₆ H ₅ N(CH ₃) ₂		X	X	C		X	A		B	B	B			X		A	A	A		
Dimethyl Ether CH ₃ OCH ₃		B	A			A	A	A		B	B	B	B							
N,N-Dimethyl Formamide (DMF) HCON(CH ₃) ₂		X	C		C	X	A	A	A	A		A	A	A ^{120°}	B	A ^{120°}	A	A		
Dimethyl Phthalate C ₆ H ₄ (CO ₂ CH ₃) ₂		X	X	C	A	C	A		A							A ^{70°}	B	A		
Dimethyl Sulfate (CH ₃) ₂ SO ₄			X			X	A				A									
Dimethyl Sulfide (CH ₃) ₂ S			X				A			A	A	A	A							
Dinitrotoluene (DNT)CH ₃ C ₆ H ₃ (NO ₂) ₂		X	X	X		C	A		B			A								
Diocetyl Phthalate (DOP) C ₂₄ H ₃₈ O ₄	X	X	X	B	A	B	A		C	A	A	A	A							A
Diocetyl Sebecate C ₂₆ H ₅₀ O ₄	C	X	X	C		C	A		C	A	A	A	A							
Dioxolanes (Dioxolans) Glycol ethers		X	X	B		C	A		C											
Dipentene (Limonene) C ₁₀ H ₁₆		X	C	X		A	A		C	A	A	A	A							
Diphenyl Oxides (Phenyl Ether) C ₆ H ₅ OC ₆ H ₅	C	X	X	C		A	A		C	B	A	A	A			A				
Dipropylamine (CH ₃ CH ₂ CH ₂) ₂ NH			B				A													

RATING KEY: (A) Excellent (B) Good (C) Fair to Poor (X) Not Recommended □ No Data Available

CHEMICAL Formula	ELASTOMERS									METAL PARTS				PLASTICS						
	RUPPLON™ (Polyurethane)	NEOPRENE	NITRILE	E.P.D.M.	HYTREL®	(FKM) FLUOROCARBON	BLUE GYLON®	PTFE, PFA	ENVELON®	SANTOPRENE®	ALUMINUM	CAST IRON/STEEL	STAINLESS STEEL	Alloy C (Hastelloy Equiv.)	POLYPROPYLENE	ACETAL	PVDF	NYLON	RYTON®	UHMW POLYETHYLENE
Dipropylene Glycol (C ₃ H ₆ OH) ₂ O			A			A		A						A		A				
Dipropyl Ketone (Butyrene) (C ₃ H ₇) ₂ CO			X					A												
Dispersing Oil #10		X	X	X		C		A			A	A	A	A						
Divinyl Benzene (DVB) C ₆ H ₄ (CH=CH ₂) ₂			X			A		A												
Dodecyl Benzene (Alkane) C ₆ H ₅ (CH ₂) ₁₁ CH ₃			X			A		A			A	A	A							
Dow Corning® (Silicones) [(CH ₃) ₂ SiO] ₂	A	A	A			A		A			A									
Dowtherm®(Biphenyl & Phenyl Ether) (C ₆ H ₅) ₂ and (C ₆ H ₅) ₂ O	C	X	X	X		A		A		X	A	B	A	A					A	
Drycleaning Fluids Chlorinated hydrocarbons		X	C			A		A		X	A	A	A		X					
Dyes			C				A				B	B	A							
Epichlorohydrin C ₃ H ₅ ClO		X	X	B	X	X		A	A	B	X	A	A	A	A	A	X	A	A	
Epsom Salts (Magnesium Sulfate) MgSO ₄ • 7H ₂ O		A	A			A		A		A	A		A	B	A		A			
Ethane C ₂ H ₆	C	C	A	X		A		A	A	C	A	A	A	A	C	A			A	
Ethanolamine (Aminoethanol) H ₂ NCH ₂ • CH ₂ OH	X	C	B	B		X		A		A	B	A	A		X	X	C	A	A	A ^{140°}
Ethyl Acetate CH ₃ COOC • H ₂ CH ₃	X	X	X	B	C	X	A	A	A	C	A	A	A	A	C	A	A	A	A	B ^{122°}
Ethyl Acetoacetate (Acetoacetic Ester) CH ₃ COCH ₂ • COOCH ₂ CH ₃	C	X	X	C		X		A		C	A	A	A	A			A ^{70°}			
Ethyl Acrylate CH ₂ CHCO ₂ • CH ₂ CH ₃	X	X	X	C		X		A		C	A	A	A	A	B		B ^{70°}			
Ethyl Alcohol (Ethanol) CH ₃ CH ₂ OH	X	A	A		X	B		A	A		B	B	A	A	A ^{100°}		A	X	A	A ^{140°}
Ethyl Aluminum Dichloride CH ₃ CH ₂ AlCl ₂			X			B		A												
Ethyl Amine (Monoethylamine) CH ₃ CH ₂ NH ₂		C	X	A		X		A			B	B	A							
Ethyl Benzene CH ₃ CH ₂ C ₆ H ₅	X	X	X	X		A		A		C	B	B	B	A	X	A	A			A
Ethyl Benzoate C ₆ H ₅ CO ₂ CH ₂ CH ₃		X	X	C		A		A		C	A	A	A	A	B			X		
Ethyl Bromide (Bromoethane) CH ₃ CH ₂ Br		B	X	B				A		X	A	A	A							
Ethyl Butyl Acetate CH ₃ CO ₂ CH ₂ • CH(C ₂ H ₅) ₂			X			X		A												
Ethyl Butyl Alcohol CH ₃ CH(C ₂ H ₅) • (CH ₂) ₂ OH			A			B		A												
Ethyl Butyl Ketone CH ₃ CH ₂ COC ₄ H ₉			X			X		A												

Data limited to % concentration and/or temperature °F shown. Where not shown temperature is 70°F (21°C) Ambient.

CHEMICAL Formula	ELASTOMERS										METAL PARTS				PLASTICS					
	RUPPLON™ (Polyurethane)	NEOPRENE	NITRILE	E.P.D.M.	HYTREL®	(FKM) FLUOROCARBON	BLUE GYLON®	PTFE, PFA	ENVELON®	SANTOPRENE®	ALUMINUM	CAST IRON/STEEL	STAINLESS STEEL	Alloy C (Hastelloy Equiv.)	POLYPROPYLENE	ACETAL	PVDF	NYLON	RYTON®	UHMW POLYETHYLENE
Ethyl Butyraldehyde C ₆ H ₁₂ O			X			X		A												
Ethyl Butyrate CH ₃ CH ₂ CH ₂ • C ^{140°} CO ₂ C ₂ H ₅		X	X	X		C		A			B	A	A	A	B				A	
Ethyl Caprylate CH ₃ (CH ₂) ₆ • CO ₂ C ₂ H ₅			X	X	X				A											
Ethyl Cellosolve® C ₂ H ₅ O(CH ₂) ₂ OH		C	C	B		X		A		B										
Ethyl Cellulose (Ethocel®)	B	B	B	B	B	C	A	A	A	A	B	A	B	B	C				B	
Ethyl Chloride (Chloroethane) C ₂ H ₅ Cl	C	C	A	A	X	A	A	A	A	C	X	B	A	B	X	A	A	B	A	X
Ethyl Chlorocarbonate (Ethyl Chloroformate) ClCO ₂ C ₂ H ₅		C				A		A		A										
Ethyl Cyanide (Propionitrile) C ₂ H ₅ CN		B	X	A		X		A												
Ethyl Formate HCOOCH ₂ CH ₃		B	X	C		A		A		B	B	A	B	B						C
Ethylhexyl Acetate CH ₃ CO ₂ CH ₂ • CH(C ₂ H ₅)C ₄ H ₉			X			X		A												
Ethylhexyl Alcohol (Ethylhexanol) C ₈ H ₁₇ OH			A			B		A			A	A	A	A						
Ethyl Iodide CH ₃ CH ₂ I																				
Ethyl Isobutyrate (CH ₃) ₂ • CHCOOCH ₂ CH ₃		X	X	X				A												
Ethyl Mercaptan (Ethanethiol) CH ₃ CH ₂ SH		C	X	X		B		A		C	B	A	B	B						
Ethyl Oxalate C ₂ H ₅ O ₂ C • CO ₂ C ₂ H ₅	A	X	X	A		B		A		B										
Ethyl Pentachlorobenzene C ₂ H ₅ C ₆ Cl ₅		X	X			A		A		X	X			X						
Ethyl Propionate CH ₃ CH ₂ • COOCH ₂ CH ₃		X	X	X				A			A	A	A	A						
Ethyl Silicate Si(OCH ₂ CH ₃) ₄		A	A	A		A		A		B	B	A	A	A						
Ethyl Sulfate C ₂ H ₅ OSO ₂ OH			A			A		A		B			X					A		
Ethylene (Ethene) C ₂ H ₄		A	B	C		A		A	A	C	A	A	A							
Ethylene Chlorohydrin ClCH ₂ CH ₂ OH	X	B	X	A	X	B		A		C		B	A	A	X			A ^{70°}		
Ethylene Diamine (CH ₂) ₂ (NH ₂) ₂		A	B	A		X		A		A	C	A	A	A	A	A	B	B	A	A
Ethylene Dibromide (Ethylene Bromide) Br(CH ₂) ₂ Br		X	X	C		B		A	A		X	X	B	B	X			A		
Ethylene Dichloride (Dutch Oil) Cl(CH ₂) ₂ Cl	X	X	X	X	X	B		A	A	X	X	B	B	B	X	B	A	B	A	X

RATING KEY: (A) Excellent (B) Good (C) Fair to Poor (X) Not Recommended □ No Data Available

CHEMICAL Formula	ELASTOMERS										METAL PARTS				PLASTICS					
	RUPPLON™ (Polyurethane)	NEOPRENE	NITRILE	E.P.D.M.	HYTREL®	(FKM) FLUOROCARBON	BLUE GYLON®	PTFE, PFA	ENVELON®	SANTOPRENE®	ALUMINUM	CAST IRON/STEEL	STAINLESS STEEL	Alloy C (Hastelloy Equiv.)	POLYPROPYLENE	ACETAL	PVDF	NYLON	RYTON®	UHMW POLYETHYLENE
Ethylene Glycol (Ethylene Alcohol) (Glycol) $(CH_2OH)_2$	B	A	A	A	A	A ^{70°}	A	A	A	A	A	A	A	A	A ^{120°}	A	A	B	A	A ^{140°}
Ethylene Glycol Monobutyl Ether (Butyl Cellosolve®) $C_4H_9OCH_2CH_2OH$	X	X	B	B		C		A			A	A	A	A						
Ethylene Glycol Monoethyl Ether Acetate (Cellosolve Acetate®) $C_2H_5O(CH_2)_2 \cdot O_2CCH_3$	X	X	C	B		C		A			A	A	A	A						
Ethylene Glycol Monomethyl Ether (Methyl Cellosolve®) $CH_3O(CH_2)_2OH$	X	C	C	B		X		A			B	B	A	A						
Ethylene Oxide $(CH_2)_2O$	X	X	X	X	A	C		A	A	A	A	B	A	A	C		A	A	X	A
Ethylene Trichloride (Trichloroethene) C_2HCl_3			X	X	X	A		A		X	X	A	A		X					
Ethylidene Chloride CH_2CHCl_2		X	X	X				A			X	B	A	B						
Fatty Acids $C_nH_{2n+1}COOH$		C	B	X	B	A		A	B	90%A	X	A	A	B	A	A	A	A		A ^{140°}
Ferric Chloride $FeCl_3$	A	A	A	A	X	A	A	A	A	X	X	X	10%A	A	A	A	X	A		A ^{140°}
Ferric Hydroxide $FeHO_2$			B			C		A					A	10%B						
Ferric Nitrate $Fe(NO_3)_3$	A	A	A	A		A		A	A	X	X	B	10%A	A	A	A	X	A		A ^{140°}
Ferric Sulfate $Fe_2(SO_4)_3$		A	A	A		A	A	A	A	C	X	B	30%A	A	B	A	X	A		A ^{140°}
Ferrous Chloride $FeCl_2$		A	A	A	X	A		A	A	X	X	30%B	50%B	A	B	A	X	A		A
Ferrous Sulfate $FeSO_4$		A	A	A	A	A		A	A	10%A	C	B	30%A	A	B	A	C	A		A ^{140°}
Fish Oil			A			A		A	B											
Fluoboric Acid (Fluoroboric Acid) HBF_4		B	A	A	X	C		A	A	X	X	30%A		A		A	X	A		A ^{140°}
Fluorine (Liquid) F_2		C	X	C	X	B	X	A	C	X		A		X		A ^{70°}	X			A
Fluorobenzene FC_6H_5		X	X	X		A		A		C				X						
Fluorolube (Fluorocarbon Oils) $F_xC_yH_z$		A	C	A		B		A		X	A	A	A	X						
Fluosilicic Acid (Sand Acid) H_2SiF_6	B	A	B	B	B	A		A	A	X	X	A ^{212°}	B	A		A	X	A		A
Formaldehyde (Formalin) $HCHO$	X	C	B	A	40°C	A	A	A	A	B	A	C	90%A	70%A	A	A	A ^{120°}	C	A	A ^{140°}
Formamide $HCONH_2$		A	A	A		X		A			A	B	B	B						
Formic Acid $HCOOH$	X	B	C	B	C	C	A	A	A	A	X	X	C	A	A ^{70°}	X	A	X	A	A ^{140°}

Data limited to % concentration and/or temperature °F shown. Where not shown temperature is 70°F (21°C) Ambient.

CHEMICAL Formula	ELASTOMERS										METAL PARTS				PLASTICS					
	RUPPLON™ (Polyurethane)	NEOPRENE	NITRILE	E.P.D.M.	HYTREL®	(FKM) FLUOROCARBON	BLUE GYLON®	PTFE, PFA	ENVELON®	SANTOPRENE®	ALUMINUM	CAST IRON/STEEL	STAINLESS STEEL	Alloy C (Hastelloy Equiv.)	POLYPROPYLENE	ACETAL	PVDF	NYLON	RYTON®	UHMW POLYETHYLENE
Freon 11 (Trichlorofluoromethane) CCl ₃ F	X	C	C	X	A	B		A	A	X	B	A	A		B		A	X	A	
Freon 12 (Dichlorodifluoromethane) Cl ₂ CF ₂	A	B	B	B	A	B		A	A	X	A	A	A				A			
Freon 13 (Chlorotrifluoromethane) ClCF ₃		A	A	A	C	A		A		X	A	A	A	A						
Freon 13B1 (Bromotrifluoromethane) BrCF ₃	A	A	A	A		A		A	A											
Freon 14 (Tetrafluoromethane) CF ₄		X	X	B				A	A											
Freon 21 (Dichlorofluoromethane) FCHCl ₂		B	X	X		X		A	A	X	A						A			
Freon 22 (Chlorodifluoromethane) HCClF ₂	X	B	X	C	X	X		A	A	X	A	A	A	A			A			
Freon 113 (Trichlorotrifluoroethane) (TF) Cl ₃ CCF ₃	C	A	B	X	A	B		A	A	X	B		A				A			
Freon 114 (Dichlorotetrafluoroethane) C ₂ Cl ₂ F ₄	A	A	A	C	A	A		A	A	X	B		A				A			
Freon 114B2 (Dibromotetrafluoroethane) C ₂ Br ₂ F ₄		A	B	X		B		A	A	X										
Freon 115 (Chloropentafluoroethane) C ₂ ClF ₅		A	A	A		B		A	A	X	A									
Fruit Juices Water, sucrose		A	A	A	B	A		A	A	A	0%A	X	A	A	A		A	X	A	A ^{140°}
Fuel Oils (ASTM #1 thru #9) Hydrocarbons	C	C	A	X	B	A	A	A	A	C	A	A	A	A	C	C	A	A	A	A
Fumaric Acid (Boletic Acid) HOOCCH = CHCOOH		B	C			A		A		A										
Furan (Furfuran) C ₄ H ₄ O		X	X	X	X	C		A		C				C		X			A	
Furfural (Ant Oil) C ₅ H ₄ O ₂	X	B	X	B		C	A	A	A	C	A	B	20%A	B	X	B	B ^{120°}	A	A	B
Furfuryl Alcohol C ₅ H ₆ O ₂	X		X	B	B	X		A			A	A	A	A			B ^{100°}			
Fusel Oil (Grain Oil) (CH ₃) ₂ • CHCH ₂ CH ₂ OH	C	A	A	A		A		A												
Gallic Acid C ₆ H ₂ (OH) ₃ • COOH	X	C	B	B	X	A		A		B	20%A	X	B	B	A ^{70°}		A ^{70°}	B	A	A ^{140°}
Gasoline (Unleaded) C ₄ to C ₁₂ • Hydrocarbons	X	X	X	X		A		A	A	C	A	A	A	A	C	A	A	A	A	B
Gasoline (Petrol) Hydrocarbons	B	C	A	X	A	A	A	A	A	C	A	A	A	A	C	A	A	A	A	C
Gelatin Water soluble Proteins	A	A	A	A	B	B	A	A	A	A	A	A	A		A	B	A	A		A
Ginger Oil C ₁₇ H ₂₆ O ₄		A				A		A		C		X	A							

RATING KEY: (A) Excellent (B) Good (C) Fair to Poor (X) Not Recommended □ No Data Available

CHEMICAL Formula	ELASTOMERS									METAL PARTS				PLASTICS							
	RUPPLON™ (Polyurethane)	NEOPRENE	NITRILE	E.P.D.M.	HYTREL®	(FKM) FLUOROCARBON	BLUE GYLON®	PTFE, PFA	ENVELON®	SANTOPRENE®	ALUMINUM	CAST IRON/STEEL	STAINLESS STEEL	Alloy C (Hastelloy Equiv.)	POLYPROPYLENE	ACETAL	PVDF	NYLON	RYTON®	UHMW POLYETHYLENE	
Glauber's Salt (Sodium Sulfate Decahydrate) Na ₂ SO ₄ •10H ₂ O	A	A	A	B	B	A		A													
Gluconic Acid C ₆ H ₁₂ O ₇			C			A		A			B	C	50%A		A						
Glucose (Corn Syrup) C ₆ H ₁₂ O ₆	A	A	A	A	B	A	A	A	A	A	A	A	A		A	A	A	A			A
Glue (PVA)	A	A	A	B	B	A	A	A	A	A	A	A	B	A	A	B		A			A
Glycerol (Glycerine) C ₃ H ₈ O ₃	A	A	A	A	A	A	A	A	A	A	A	B	A	A	A	A	A	B	A		A ^{140°}
Glycolic Acid HOCH ₂ COOH		A	A			A				A				A	A		A			A	A ^{140°}
Glycols		A	A			A		A	A	A	B	B	B		A	A	A	A	A		A ^{140°}
Gold Monocyanide AuCN		A	A			A				A				X	A						
Grape Juice Water, sucrose		X	C			A		A		A		X	A		A		A				
Grapefruit Oil	A	X	X					A				X	A								
Grease Hydrocarbons		X	A		A	A		A	A	B	A		A								
Green Sulfate Liquor		B	B	A	X	A	A	A	B	A	B	C	A	B	A						
Halowax Oil Chlorinated naphthalenes		X	X	X		A		A		X	X										
Heptanal CH ₃ (CH ₂) ₅ CHO			A			A	X				A	A	A	A	A						
Heptane C ₇ H ₁₆	B	C	A	X		A		A	A	C	A	A	A	A	C ^{140°}	A	A	A	A	A	A
Hexanal CH ₃ (CH ₂) ₄ CHO	C	A	X	B		C		A			A	B	A	B							
Hexalin (Cyclohexanol) C ₆ H ₁₁ OH		A	B	C		A		A													
n-Hexane C ₆ H ₁₄	B	B	A	X	A	A		A	A	A	A	A	A	A	C ^{140°}	C	A	A	A	A	B
n-Hexane 1 (Hexylene) H ₂ CCH(CH ₂) ₃ CH ₃	A	B	A	X		A		A		C											
Hexyl Alcohol (1-Hexanol) C ₆ H ₁₃ OH	X	B	A	C		A		A			A	A	A				A				A ^{140°}
Hexylene Glycol (Brake Fluid) C ₆ H ₁₂ (OH) ₂		A	A	C		A		A			A	A	A	A							
Honey		A						A		A	A	A	A		A						
Hydraulic Oil (Petroleum Base) Hydrocarbons	A	B	A	X	X	A		A		X	A	A	A	A	X	C		A			A
Hydrazine (Diamine) H ₂ NNH ₂	X	C	C	A	X	X		A	A	A	A	X	A	A	X	B	X				
Hydrobromic Acid HBr	X	C	X	A		A	A	A	A	B	A	A	A		B	X	A	X	A		A ^{140°}
Hydrochloric Acid 10% (Muratic) HCl	B	B	B	A		A		A	A	A	X	C	X	B	A	X	A	A	A	A	A
Hydrochloric Acid 20% (Muratic) HCl	B	B	B	A	C	A		A	A	A	X	C	X	A	A	X	A	A	A	A	A

Data limited to % concentration and/or temperature °F shown. Where not shown temperature is 70°F (21°C) Ambient.

CHEMICAL Formula	ELASTOMERS									METAL PARTS				PLASTICS						
	RUPPLON™ (Polyurethane)	NEOPRENE	NITRILE	E.P.D.M.	HYTREL®	(FKM) FLUOROCARBON	BLUE GYLON®	PTFE, PFA	ENVELON®	SANTOPRENE®	ALUMINUM	CAST IRON/STEEL	STAINLESS STEEL	Alloy C (Hastelloy Equiv.)	POLYPROPYLENE	ACETAL	PVDF	NYLON	RYTON®	UHMW POLYETHYLENE
Hydrochloric Acid 30% (Conc.) HCl	X	C	C	A	X	B		A	A		X	X	X	A	B	X	A	X	A	A
Hydrocyanic Acid (Formonitrile) HCN	C	C	B	A	X	A	A	A	A	B	10%A	X	A	B	A	X	A	A		A ¹²²
Hydrogen Fluoride — Anhydrous HF	C	C	X	C		A	X	A	C		X		X	A	A		A	X		
Hydrofluoric Acid (Conc.) Cold HF *SEE NOTE BELOW	X	C		C	X	B	X	A	C	X	C	X	X	B	40%A	X	A	X	A	A ^{140*}
Hydrogen Peroxide — 3% H ₂ O ₂		B	B	B	X	A		A	A	A	A				A		A	X	X	A ^{122*}
Hydrogen Peroxide — 10% H ₂ O ₂		C	C	B	X	A		A	A		A	B	A	A	A		A	X	X	A ^{122*}
Hydrogen Peroxide — 30% H ₂ O ₂		X	C	B	X	A		A	A		A	X	B	A	A		A	X	X	A ^{122*}
Hydrogen Peroxide — 90% H ₂ O ₂	C	B	X	C	X	A		A	A		A	X	A					X	X	A
Hydrogen Sulfide (Wet) H ₂ S		C	X	A	A	X	A	A	A	A	90%A	X	A ^{167*}	A ^{167*}	A	C	A	X	A	A
Hydroquinone C ₆ H ₄ (OH) ₂		X	C			C		A		A	90%A	B	10%A	B			A			A ^{140*}
Hydroxyacetic Acid — 10% HOCH ₂ COOH		X	X					A		70%A	B		B							
Hypochlorous Acid HClO		X	X	B		A		A		A	X	X	X	A	A		A	X		A ^{140*}
Ink	A	A			A		A		A	C	X	A	A						A ^{140*}	
Iodine I ₂		B	B	B	B	A		A		A	A	X	X	A	A		A ^{150*}	X		B
Iodoform CHI ₃				A				A		B	A	A	A	A			A			
Isoamyl Acetate CH ₃ CO ₂ CH ₂ CH ₂ CH • (CH ₃) ₂	X	X	X	B		X		A			A	A	A	A						
Isoamyl Alcohol (CH ₃) ₂ •CHCH ₂ CH ₂ OH	C	A	A	A		A		A												
Isoamyl Butyrate C ₉ H ₁₈ O ₂			X			X		A			A	A	A	A						
Isoamyl Chloride (CH ₃) ₂ CHCH ₂ CH ₂ Cl		X	X	X		A		A			X									
Isobutyl Acetate CH ₃ CO ₂ CH ₂ •CH(CH ₃) ₂		X	X	C		X		A			A	A	A	A						
Isobutyl Alcohol (Isobutanol) (CH ₃) ₂ •CHCH ₂ OH	X	B	B	A		A		A			A				A	A	A	A	A	A ^{140*}
Isobutyl Amine (CH ₃) ₂ •CHCH ₂ NH ₂			X			X		A												
Isobutyl Chloride (CH ₃) ₂ •CHCH ₂ Cl			X			B		A			X	B	B	90%A						
Isobutyric Acid (CH ₃) ₂ •CHCOOH		B	X	A				A			A									
Isododecane (CH ₃) ₂ •CH(CH ₂) ₈ CH ₃	B	A	B	X		A		A			B	B	B	B						

RATING KEY: (A) Excellent (B) Good (C) Fair to Poor (X) Not Recommended □ No Data Available

*NOTE: Glass-filled Polypropylene pump sections are not compatible with Hydrofluoric Acid.

CHEMICAL Formula	ELASTOMERS									METAL PARTS				PLASTICS						
	RUPPLON™ (Polyurethane)	NEOPRENE	NITRILE	E.P.D.M.	HYTREL®	(FKM) FLUOROCARBON	BLUE GYLON®	PTFE, PFA	ENVELON®	SANTOPRENE®	ALUMINUM	CAST IRON/STEEL	STAINLESS STEEL	Alloy C (Hastelloy Equiv.)	POLYPROPYLENE	ACETAL	PVDF	NYLON	RYTON®	UHMW POLYETHYLENE
Isooctane (Trimethylpentane) C ₈ H ₁₈	B	B	A	X	A	A		A		C	A	A	A	A	A		A	A	A	
Isopentane (CH ₃) ₂ CHCH ₂ CH ₃			A			A		A												
Isophorone C ₉ H ₁₄ O	C	X	X	C		X		A		B	A	A	A	A						
Isopropyl Acetate CH ₃ COOCH ₂ (CH ₃) ₂	A	X	X	B		X		A		B	A	A	A	A	B				A	
Isopropyl Alcohol (Isopropanol) CH ₃ CH(OH)CH ₃	X	A	B	B	A	A		A	A		90%A	A	A	A	A	A	A	X	A	A ^{140°}
Isopropyl Amine C ₃ H ₇ NH ₂			X			X		A				A	A							
Isopropyl Chloride (CH ₃) ₂ CHCl	X	X	X	X		B		A		C	X	A	A	A	X					
Isopropyl Ether (CH ₃) ₂ CHOCH • (CH ₃) ₂	C	C	C	X		C		A		C	B		A		X		A ^{70°}	A		
Jet Fuels (JP1 to JP6) (ASTM-A, A1 & B)	C	C	A	X	A	A		A	A	C	A	A	A	A	X	A	A	A	A	
Kerosine (Kerosene) Hydrocarbons	C	C	A	X	A	A	A	A	A	C	A	A	A	A	X	A	A	A	A	C ^{140°}
Lacquers	X	X	X	X	X	X	A	A	A	C	A	B	A	A		B		A		
Lacquer Solvents	X	X	X	X	C	X	A	A	A	C	A	B	A	A	C	B	X	B		
Lactic Acid CH ₃ CHOH • COOH		B	B	A	X	A	A	A	A	A	A	X	70%A	60%A	A	C	A	X	A	A ^{140°}
Lactol (Aliphatic Naptha Solvent) CH ₃ CHOH • CO ₂ C ₁₀ H ₇		X	C			A		A			A	A	A	A						
Lard (Lard Oil) Olein, stearin	A	C	A	X	B	A		A		B	A	A	B	A	A	B	A	A		A ^{140°}
Latex Rubber emulsion		A	A					A			A		A		A	C		A		
Lauryl Alcohol (n-Dodecanol) CH ₃ (CH ₂) ₁₀ • CH ₂ OH			A			B				A	A	A	A	A						A ^{140°}
Lavender Oil Ester mixture		X	B	X		B		A		B										
Lead Acetate (Sugar of Lead) Pb(CH ₃ CO ₂) ₂	X	A	B	A		X		A		A	X		B	B	A	A	A	B	A	A
Lead Chloride PbCl ₂		B						A			X		B	B	A		A			
Lead Nitrate Pb(NO ₃) ₂		A	B	A		A		A			X	B	B	B	A		A			A ^{125°}
Lead Sulfamate			A	B		A		A			A					A			B	
Lemon Oil (Cedro Oil) Hydrocarbons			C				A		A		C	A		A						
Ligroin (Ligroine) (Benzine) Petroleum fraction		B	A	X		A		A		B		A	A		X					
Lignin Liquor Blend of natural aromatic oils		A	A			A		A					A							

Data limited to % concentration and/or temperature °F shown. Where not shown temperature is 70°F (21°C) Ambient.

CHEMICAL Formula	ELASTOMERS									METAL PARTS				PLASTICS						
	RUPPLON™ (Polyurethane)	NEOPRENE	NITRILE	E.P.D.M.	HYTREL®	(FKM) FLUOROCARBON	BLUE GYLON®	PTFE, PFA	ENVELON®	SANTOPRENE®	ALUMINUM	CAST IRON/STEEL	STAINLESS STEEL	Alloy C (Hastelloy Equiv.)	POLYPROPYLENE	ACETAL	PVDF	NYLON	RYTON®	UHMW POLYETHYLENE
Lime, Soda (Slaked Lime & Soda Ash) CaO	C	B	B	A		B	A		A											
Lime Bleach		C	A	A		A	A		A	X				B						
Lime Slurries		A	B		C	B	A			B		B								
Lime Sulfur CaS+CaSO ₄		A	A	A		A	A		B	X		A		A			B			A
Limonene C ₁₀ H ₁₆		X	C	X		A	A													
Linoleic Acid C ₁₈ H ₃₂ O ₂		X	B	X		B	A		B	A		A	A	A		A				
Linseed Oil (Flaxseed Oil) Glycerides	B	A	A	C	B	A	A	A	A	B	A	A	A	A	A	A	A	A	A	A
Lindol (Tritolyl Phosphate) C ₂₁ H ₂₁ O ₄ P		C	X			B	A		A											
Lithium Bromide LiBrH ₂ O		X	A			A	A	A			A					A				
Lubricating Oils (Petroleum) Hydrocarbons	C	B ^{150°}	A	X	A	A	A	A	A	X	A	A	A	A	C	A	A	A	A	A
Lye (Potassium Hydroxide) KOH		B	C		C	B	A	B	A			A		A	X	A ^{150°}	C	A		A ^{140°}
Magnesium Carbonate MgCO ₃		A	A	C	A	A		A	A		A	B	B	B	A	A	A	A		A ^{140°}
Magnesium Chloride MgCl ₂ O	A	A	A	A	A	A	A	A	A		20%A	30%B	50%B	A	A	B	A	A	A	A
Magnesium Hydroxide (Milk of Magnesia) Mg(OH) ₂	A	B	B	A	C	A	A	A	A		10%A	A	A	A	A	A	A	B	A	A
Magnesium Nitrate Mg(NO ₃) ₂ • 6H ₂ O		A	A	A		A	A		A		50%B	B	A	B	A		A	A	A	A ^{140°}
Magnesium Oxide MgO		A	A			B	A		A		10%A	A	A	A						
Magnesium Sulfate (Epsom Salts) MgSO ₄ • 7H ₂ O		A	A	A	B	A	A	A	A		70%A	A	50%A	A	A	A	A	A	A	A
Maleic Acid (CHCOOH) ₂		A	X	X		A	A		A		20%A	60%B	B	A	A		A	X		A ^{140°}
Maleic Anhydride C ₄ H ₂ O ₃				X		A	A		A		20%A	B	A	A						
Malic Acid (Apple Acid) C ₄ H ₆ O ₅		C	B	X		A	A		A		B		A	B ^{212°}						
Maple Sugar Liquors (Sucrose) Water, sucrose	X	A	A	A		A	A						A							
Mayonnaise Water, fats, oils		A	A						A		X	X	A	A	A					A
Mercuric Chloride HgCl ₂		B	A	A		A	A	A	A		X	X	X	30%B	A	B	A	X		A ^{140°}
Mercuric Cyanide Hg(CN) ₂		B	B	A		A	A		A		X	B	B	B	A		A			A ^{140°}
Mercurous Nitrate Hg ₂ (NO ₃) ₂ • 2H ₂ O		B	B	A		A	A				X	B	B ^{212°}	B	A		A			A ^{140°}

RATING KEY: (A) Excellent (B) Good (C) Fair to Poor (X) Not Recommended □ No Data Available

CHEMICAL Formula	ELASTOMERS										METAL PARTS			PLASTICS						
	RUPPLON™ (Polyurethane)	NEOPRENE	NITRILE	E.P.D.M.	HYTREL®	(FKM) FLUOROCARBON	BLUE GYLON®	PTFE, PFA	ENVELON®	SANTOPRENE®	ALUMINUM	CAST IRON/STEEL	STAINLESS STEEL	Alloy C (Hastelloy Equiv.)	POLYPROPYLENE	ACETAL	PVDF	NYLON	RYTON®	UHMW POLYETHYLENE
Mercury Hg	A	A	A	A	A	A	A	A	A	A	X	A	A	A	A	C	A	A		
Mesityl Oxide (CH ₃) ₂ C = CHCOCH ₃		X	X	B		X		A		C	A	A	A	A						
Methane CH ₄	C	B	A	X	B	A		A	A	C	A	A	A	A	B	A	A	A		
Methyl Acetate CH ₃ CO ₂ CH ₃		C	X	C	C	X		A		B	A	A	A	A	C	B		A		
Methyl Acetoacetate CH ₃ COCH ₂ • COOCH ₃			X			X		A				A	A	A						
Methyl Acrylate CH ₂ CHCO ₂ CH ₃		C		C		X		A		B		A	A				A ^{70°}			
Methyl Acrylic Acid (Crotonic Acid) CH ₃ (CH ₂)COOH		C		C		X		A	A											
Methyl Alcohol (Methanol) CH ₃ OH	X	A	A	A	A	B	A	A	A	A	B	A	A	A	A	A	A	X	A	A
Methyl Amine (Monomethylamine) CH ₃ NH ₂		A	B	A		90%A		A			B	B	A	B	X		C			
Methyl Amyl Acetate C ₆ H ₁₆ O ₂			A			X		A			A	A	A	A						
Methyl Amyl Alcohol C ₆ H ₁₃ OH			A			X		A			A	A	A	A						
Methyl Aniline C ₆ H ₅ NH(CH ₃)		A	A	A				A												
Methyl Bromide (Bromo Methane) CH ₃ Br		X	C	A	X	A		A		X	X	A	A	B	X		A	X		C
Methyl Butyl Ketone (2-hexanone) CH ₃ COC ₄ H ₉		X	X	B		X		A		C			A		X					
Methyl Butyrate CH ₃ (CH ₂) ₂ • CO ₂ CH ₃		X	X	X				A			A	A	A	A						
Methyl Cellosolve® CH ₃ OCH ₂ • CH ₂ OH		X	X			X		A		B	A			A			A	A		
Methyl Chloride CH ₂ Cl	X	X	X	C	X	B	A	A	A	X	X	A	A	A	X	B	A	B	A	C
Methyl Cyclopentane C ₆ H ₁₂		X	B	X		A		A		C			A							
Methyl Dichloride CH ₂ Cl ₂		X	X			A				X	X			X						
Methyl Ethyl Ketone (Butanone) CH ₃ CO • CH ₂ CH ₃	X	X	X	A	C	X		A	A	B	A	A	A	A	X	B	X	A	A	X
Methyl Formate HCOOCH ₃		B	X	C		X		A		B	A	A	A							
Methyl Hexane C ₇ H ₁₆		A	A	X		A		A												
Methyl Iodide CH ₃ I		X	X	A				A			X	A	A	A						

Data limited to % concentration and/or temperature °F shown. Where not shown temperature is 70°F (21°C) Ambient.

CHEMICAL Formula	ELASTOMERS									METAL PARTS				PLASTICS						
	RUPPLON™ (Polyurethane)	NEOPRENE	NITRILE	E.P.D.M.	HYTREL®	(FKM) FLUOROCARBON	BLUE GYLON®	PTFE, PFA	ENVELON®	SANTOPRENE®	ALUMINUM	CAST IRON/STEEL	STAINLESS STEEL	Alloy C (Hastelloy Equiv.)	POLYPROPYLENE	ACETAL	PVDF	NYLON	RYTON®	UHMW POLYETHYLENE
Methyl Isobutyl Ketone (Hexone) CH ₃ COCH ₂ CH ₂ •(CH ₃) ₂		X	X	C	X	X		A	A	C	A	B	B	A	C ^{70°}	A	A ^{70°}	X	A	
Methyl Isopropyl Ketone CH ₃ COCH(CH ₃) ₂		X	X	C	X	X		A		C			A		C		A ^{70°}			
Methyl Methacrylate CH ₂ C(CH ₃)•CO ₂ CH ₃		X	X	X			C	A	A	B	B		A				A ^{70°}			
Methyl Oleate C ₁₉ H ₃₆ O ₂		X	X	C			B	A		C										
Methyl Propyl Ketone CH ₃ CH ₂ •CH ₂ COCH ₃		X	X	B		X		A												
Methyl Salicylate (Betula Oil) HOC ₆ H ₄ •COOCH ₃		X	X	C			B	A		B	A	A								
Methylacrylic Acid CH ₃ CHCHCO ₂ H			B				B	A	A	A										
Methylamine CH ₃ NH ₂		A	B	A			90%A	A		A	B	B	A	B	A					
Methylene Bromide CH ₂ Br ₂		X	X				B	A			X	A	A	A			A			
Methylene Chloride CH ₂ Cl ₂	X	X	X	X	X	B		A	A	X	X	B	90%A	A	X		B ^{100°}	A	A	X
Milk	X	A	B	A	B	A	A	A	A	A	A	X	A	A	A	A	A	A		A
Mine Water			A					A			B		B	A						
Mineral Oil (Petroleum) Hydrocarbons	A	B	A	X	A	A	A	A	A	C	A	A	A	A	B	A	A	A	A	A
Mixed Acids (Sulfuric & Nitric) H ₂ SO ₄ , HNO ₃	X	X	X	B		A		A			X	X	B	B	X		A	C		
Molasses	X	A	A	A	B	A		A		A	A	A	A	A	A	B	A	A	A	A
Monochlorobenzene C ₆ H ₅ Cl		X	X		C	A		A		C	X	A	A		X	A	A ^{100°}	B	A	B
N-Methyl Aniline C ₆ H ₅ NHCH ₃		X	X			C		A							C					
Monoethanolamine NH ₂ C ₂ H ₄ OH		C	B			C		A		A	B	A	A		X	X	X	A	A	
Mustard		A	C		B	X		A		A	B	X	A	A	A	A		A		
Naphtha (Petroleum Spirits) (Thinner) Petroleum fractions	C	X	A	X	A	A		A	A	C	A	B	A	A	X	A	A	A	A	A
Naphtha Coal Tar (Benzol) Hydrocarbons	X	X	X	X		A		A	A		A	B	A	A						
Naphthalene (Tar Camphor) C ₁₀ H ₈	C	X	X	X	C	A		A	A	C	B	A	A	A	A	A	A	A	A	B
Naphthoic Acid C ₁₁ H ₆ O ₂			B	X		A		A			B	B	A	B						
Neatsfoot Oil			A	C		A		A		B			A							
Neohexane (2,2-dimethylbutane) C ₆ H ₁₄			A			A		A												
Neosol	X	A	A	B		C		A			B	B	A	A						
Neville Acid		C	C	C		B		A		A										

RATING KEY: (A) Excellent (B) Good (C) Fair to Poor (X) Not Recommended □ No Data Available

CHEMICAL Formula	ELASTOMERS									METAL PARTS				PLASTICS						
	RUPPLON™ (Polyurethane)	NEOPRENE	NITRILE	E.P.D.M.	HYTREL®	(FKM) FLUOROCARBON	BLUE GYLON®	PTFE, PFA	ENVELON®	SANTOPRENE®	ALUMINUM	CAST IRON/STEEL	STAINLESS STEEL	Alloy C (Hastelloy Equiv.)	POLYPROPYLENE	ACETAL	PVDF	NYLON	RYTON®	UHMW POLYETHYLENE
Nickel Acetate Ni(CH ₃ CO ₂) ₂		B	B	A		X		A		A	10%B		A			A				
Nickel Chloride NiCl ₂	A	A	A	A	X	A	A	A	A	A	X	X	B	80%A ^{200°}	A	B	A	B	A	A
Nickel Nitrate Ni(NO ₃) ₂ • 6H ₂ O		A	A	A		A		A			X		A	B	A		A	A	A	A
Nickel Sulfate NiSO ₄	A	A	A	A		A	A	A	A	A	X	X	40%A	B	A	A	A	B	A	A
Nitrana (Ammonia Fertilizer)		B	B			C		A					A							
Nitric Acid — 10% HNO ₃	C	B	X	B	C	A		A	A	A	A	X	A	A	A		A	X	X	A ^{140°}
Nitric Acid — 25% HNO ₃	C	C	X	B	X	A		A	A	20%B	X	X	30%A	30%A	A		A	X	X	A ^{140°}
Nitric Acid — 35% HNO ₃	C	X	X	C	X	A	A	A	A		X	X	50%A	50%A	B		A	X	X	C ^{140°}
Nitric Acid —50% HNO ₃	C	X	X	X	X	A		A	A	C	X	X	A	X	C		A	X	X	X
Nitric Acid — 70% HNO ₃	X	X	X	X	X	A		A	A			X	A	X			A	X	X	X
Nitric Acid (Conc.) HNO ₃	X	X	X	X	X	B		A	A	C	A	X	A	40%A	X		A ^{120°}	X	X	
Nitric Acid (Red Fuming)	X	X	X	X	X	B	X	A	A	X	A	X	A	B	X		C			X
Nitrobenzene C ₆ H ₅ NO ₂	X	X	X	X	X	B	A	A	A	B	A	A	A	55%B ^{212°}	B	B	A ^{70°}	B	A	X
Nitroethane C ₂ H ₅ NO ₂		C	X	C		X		A		A	A	A	A	C			A ^{70°}			
Nitrogen Tetroxide N ₂ O ₄		X	X	X	50%B	C		A	A		A	B	A	A	X		C			
Nitromethane CH ₃ NO ₂		C	X	C	X	X		A	A	A	A	A	A	C	A ^{120°}	B	A			
1-Nitropropane CH ₃ (CH ₂) ₂ NO ₂		C	X	A		X		A	A		A	A	A	A						
Octadecane CH ₃ (CH ₂) ₁₆ CH ₃	A	B	A	X		A		A		B										
n-Octane C ₈ H ₁₈			A	X		A		A		B				X		A	A			
Octyl Acetate CH ₃ COO • (CH ₂) ₇ CH ₃			X			X		A			A		A							
Oleic Acid (Red Oil) C ₁₈ H ₃₄ O ₂	X	X	C	C	A	B	A	A	A		A	C	B	A	B	B	A	B	A	A
Octachlorotoluene C ₇ Cl ₈		X	X			A		A			X			X						
Oleum (Fuming Sulfuric Acid) H ₂ SO ₄ /SO ₃		X	C		20-25%	X	A		A	X	X	X	A		X		X			X
Olein (Trioleine) C ₅₇ H ₁₀₄ O ₆		C	B					A												
o-Dichlorobenzene C ₆ H ₄ Cl ₂		X	X			A		A		X	X	A	A		X					
Olive Oil Mixed glycerides of acids	A	C	A	C		A		A		B	A	A	A	A	A	A	A	A		A ^{140°}

Data limited to % concentration and/or temperature °F shown. Where not shown temperature is 70°F (21°C) Ambient.

CHEMICAL Formula	ELASTOMERS										METAL PARTS				PLASTICS					
	RUPPLON™ (Polyurethane)	NEOPRENE	NITRILE	E.P.D.M.	HYTREL®	(FKM) FLUOROCARBON	BLUE GYLON®	PTFE, PFA	ENVELON®	SANTOPRENE®	ALUMINUM	CAST IRON/STEEL	STAINLESS STEEL	Alloy C (Hastelloy Equiv.)	POLYPROPYLENE	ACETAL	PVDF	NYLON	RYTON®	UHMW POLYETHYLENE
Oxalic Acid (COOH) ₂		B	C	A	X	C	A	A	A	A	B	X	90%B	B	A	X	A ^{120°}	B	A	A ^{140°}
Ozone O ₃	A	B	X	A	C	A	A	A	A	A	10%A	0%A	A	A	X	C	A	X		B
Paints & Solvents		X	X					A			X		A	A						
Paint Thinner, DUCO Hydrocarbons	X	C	A	X		B		A		C	X		A	A	X					
Palm Oil Mixture of terpenes		C	A			A		A		B		A	A	A						A ^{140°}
Palmitic Acid CH ₃ (CH ₂) ₁₄ COOH	A	C	B	B	A	B	A	A	A	B	B	B	A		A		A	C		
Paraffins (Paraffin Oil) Hydrocarbons			A					A	A	A	A		A	A	A	A		A		A
Paraformaldehyde (CH ₂ O) _n		B	B			C		A			10%A	A	A	A						
Paraldehyde C ₆ H ₁₂ O ₃		B	C	A		X		A			A	A	A	A						
Peanut Oil Glycerides of fatty acids	C	B	A	X		A		A		B		A	A	A	A ^{70°}		A			
Pentachloroethane (Pentalin) Cl ₂ • CHCl ₃		X	X			A		A			X	A	A	A						
Pentachlorophenol (PCP) C ₆ Cl ₅ OH		X	X	X		A		A	A		A	A	A	A						
Pentane (Amyl Hydride) C ₅ H ₁₂		B	A	X	B	A		A	A	A	A	B	B					A		
Peppermint Oil		X	X			A		A		C			A							C
Perchloric Acid HClO ₄		B	X	B	X	A	A	70%A	A	C	X	X	B			C	A	X	A	A ^{140°}
Perchloroethylene (Tetrachloroethylene) C ₂ Cl ₄	X	X	X	X	X	A		A	A	X	X	B	90%A	B	X	A	A	C	A	
Petroleum (Crude Oil) (Sour) Hydrocarbons	C	C	B	X	C	A	A	A	A		B	B	A	A	X	A	A	A		A
Phenethyl Alcohol (Benzyl Carbinol) C ₆ H ₅ (CH ₂) ₂ OH	X	X	X	B		X		A			A	A	A	A						
Phenol (Carbolic Acid) C ₆ H ₅ OH	X	C	X	C	X	A		A	A	A	B	A	B	A	C	X	A ^{100°}	X	A	C
Phenyl Sulfonic Acid C ₆ H ₄ (OH)SO ₃ H			X			X		A			B	B	B							
Phenyl Acetate CH ₃ COOC ₆ H ₅	X	X	X	B		X		A												
Phenylbenzene C ₆ H ₅		X	X			A		A		C										
Phenyl Ethyl Ether (Phenetole) C ₆ H ₅ OC ₂ H ₅		X	X	X		C		A		C										
Phenyl Hydrazine C ₆ H ₅ NHNH ₂		X	X	X		A		A		B	A	X		X		A ^{120°}				

RATING KEY: (A) Excellent (B) Good (C) Fair to Poor (X) Not Recommended □ No Data Available

CHEMICAL Formula	ELASTOMERS									METAL PARTS				PLASTICS						
	RUPPLON™ (Polyurethane)	NEOPRENE	NITRILE	E.P.D.M.	HYTREL®	(FKM) FLUOROCARBON	BLUE GYLON®	PTFE, PFA	ENVELON®	SANTOPRENE®	ALUMINUM	CAST IRON/STEEL	STAINLESS STEEL	Alloy C (Hastelloy Equiv.)	POLYPROPYLENE	ACETAL	PVDF	NYLON	RYTON®	UHMW POLYETHYLENE
Phorone (Diisopropylidene Acetone) C ₉ H ₁₄ O		X	X	C		A	A		B											
Phosphoric Acid — 10% H ₃ PO ₄	A	B	A	A		A	A	B	A	X	X	A		A ^{120°}		A	X	A	A	A ^{140°}
Phosphoric Acid — 20% H ₃ PO ₄	A	B	C	A		A	A	B	A	X	X	A ^{212°}	A	A ^{120°}		A	X	A	A	A ^{140°}
Phosphoric Acid — 50% H ₃ PO ₄	A	B	X	B		A	X	A	B	^{45%} B	X	X	A	C	A ^{120°}		A	X	A	A ^{140°}
Phosphoric Acid (Conc.) H ₃ PO ₄	C	B	X	B	X	A		A	C		X	X	A ^{212°}		A ^{120°}		A	X	A	A ^{140°}
Phosphorus Oxychloride POCl ₃		X						A			B	B	B	B						
Phosphorus Trichloride PCl ₃		X	X	A		A		A		B	C	B	A	A	X		A		A	A ^{140°}
Photographic Developer		A	A		X	A			A	C	X	A	A	A	C	A	B	A	A	A ^{140°}
Pickling Solution	C	X		X		B		A	A				A							A
Picric Acid (Carbazotic Acid) (NO ₂) ₃ • C ₆ H ₂ OH	B	B	B	B	X	A		A	A	B	A	C	A	B	B		A	X		A ^{140°}
Pine Oil (Yarmor) Cyclic terpene alcohols		X	B	X		A		A		C	A	B	A							C
Pinene C ₁₀ H ₁₆	C	X	B	X		A		A	A	C										
Piperidine C ₅ H ₁₁ N		X	X	X		X		A	A	B										
Plating Solution — Cadmium			B	B				A		A			A		X		B	A		
Plating Solution — Chrome	X	X	X	C		A		A	A					A ^{131°}	X		B	X	A	A ^{140°}
Plating Solution — Lead		B	B					A	A						A		B	X		C ^{140°}
Plating Solution — Others		C	A	A		B		A	A			A								A ^{140°}
Polyvinyl Acetate Emulsion PVac + H ₂ O		C		A				A	A		B					A				
Potassium Acetate CH ₃ CO ₂ K		B	B	A		X		A	A	A	^{10%} B	A	B	B	A		A			
Potassium Bicarbonate KHCO ₃		A	A			A		A	A	A	B	^{50%} B	^{30%} A	^{50%} B	A		A	A	A	A
Potassium Bisulfate KHSO ₄		A	A			A		A		A	^{10%} A	X	^{10%} A		A		A			A
Potassium Bisulfite KHSO ₃		A	A			A		A		A	^{10%} B		^{10%} B	^{90%} B						
Potassium Bromide KBr		A	A	A		A		A	A	A	A	^{80%} B ^{212°}	^{90%} B ^{212°}	^{70%} A ^{167°}	A		A	A	A	
Potassium Carbonate (Potash) K ₂ CO ₃	C	A	A	A		A		A	A	A	X	B	B	^{90%} A	A	B	A	C	A	A
Potassium Chlorate KClO ₃		A	A	A		A		A	A	A	X	B	^{60%} A	^{20%} A	A	B	A	B	A	A
Potassium Chloride KCl	A	A	A	A		A		A	A	A	X	B	A	^{30%} A ^{167°}	A	B	A	B	A	A
Potassium Chromate K ₂ CrO ₄		A	A		^{50%} A	A	A	A	A	A	A	A	A		A		A	A		A ^{140°}

Data limited to % concentration and/or temperature °F shown. Where not shown temperature is 70°F (21°C) Ambient.

CHEMICAL Formula	ELASTOMERS										METAL PARTS				PLASTICS					
	RUPPLON™ (Polyurethane)	NEOPRENE	NITRILE	E.P.D.M.	HYTREL®	(FKM) FLUOROCARBON	BLUE GYLON®	PTFE, PFA	ENVELON®	SANTOPRENE®	ALUMINUM	CAST IRON/STEEL	STAINLESS STEEL	Alloy C (Hastelloy Equiv.)	POLYPROPYLENE	ACETAL	PVDF	NYLON	RYTON®	UHMW POLYETHYLENE
Potassium Copper Cyanide K ₃ [Cu(CN) ₄]	A	A	A	A		A	A							A		A				
Potassium Cyanide KCN	A	A	A	A		A	A	A	A	C	B	90%B ^{212*}	30%B	A	C	A	A	A	A	A ^{140*}
Potassium Dichromate K ₂ Cr ₂ O ₇	A	A	A	A		A	A	A	A	A	A	A	25%B	A	C	A	X	A	A	A
Potassium Hydroxide (Caustic Potash) (Lye) KOH	B	B	B	A	C	B		A	B	A	X	B	A	50%B	A	C	A ^{150*}	B	A	A ^{140*}
Potassium Iodide KI		A	A	A		A		A			10%B		B	B	A		A			B
Potassium Nitrate (Saltpeter) KNO ₃	A	A	A	A		A		A	A		80%A	B	80%B ^{212*}	80%B ^{212*}	A	B	A	B	A	A
Potassium Nitrite KNO ₂	A	A	A	A	B	A		A			B	B	B	B						
Potassium Permanganate (Purple Salt) KMnO ₄		C	C	A	X	B		A	A	A	10%A	B	30%B ^{212*}	A	B	A	A	X	A	A ^{140*}
Potassium Phosphate KH ₂ PO ₄		A	A	A		A		A			X	X	30%B	10%B						
Potassium Silicate K ₂ Si ₂ O ₅		A	A	A		A		A			B	B	B	B						
Potassium Sulfate K ₂ SO ₄	A	A	A	A	B	A	A	A	A	A	B	B	A	A	A	B	A	B	A	A
Potassium Sulfide K ₂ S	A	A	A	A		A		A			X	B	B	10%B	A		A	A	A	A ^{140*}
Potassium Sulfite K ₂ SO ₃ ·2H ₂ O		A	A	A		A		A			A	X	50%B		A		A			A ^{140*}
Propane (LPG) C ₃ H ₈	B	B	A	X	B	A	A	A	A	C	A	A	A	A	X	A	A	C		A
Propionaldehyde (Propanal) C ₂ H ₅ CHO			X			X		A			A	A	A	A						
Propionic Acid (Methylacetic Acid) CH ₃ CH ₂ CO ₂ H		X	X	A		X		A			A	X	B	90%A						
n-Propyl Acetate CH ₃ COO·(CH ₂) ₂ CH ₃		X	X	A		X		A		B	A		A	A	C		A			
Propyl Alcohol (1-Propanol) CH ₃ CH ₂ CH ₂ OH	X	B	B	A		A		A			A	A	A	A	A	A	A	X	A	A ^{140*}
n-Propyl Nitrate (NPN) CH ₃ (CH ₂) ₂ NO ₃			A	B		C	A	A		B	A	X								
Propylene C ₃ H ₆		X	X	X		A		A	A	B	A	A	A	A						
Propylene Dichloride CH ₃ CH(Cl)CH ₂ Cl		X	X	X		B		A			X	A	A	B						X
Propylene Glycol (Methyl Glycol) C ₃ H ₆ (OH) ₂		C	A	A		A		A		A	A	A	A	A	A	A	A	B	A	A ^{140*}
Propylene Oxide C ₃ H ₆ O		X		C		X		A		A	B	B	A		X		X			
Pydraul (Phosphate Eser Base Fluid)	X	X	X	B	A	A		A		A		A	A	A				C		

RATING KEY: (A) Excellent (B) Good (C) Fair to Poor (X) Not Recommended □ No Data Available

CHEMICAL Formula	ELASTOMERS									METAL PARTS				PLASTICS						
	RUPPLON™ (Polyurethane)	NEOPRENE	NITRILE	E.P.D.M.	HYTREL®	(FKM) FLUOROCARBON	BLUE GYLON®	PTFE, PFA	ENVELON®	SANTOPRENE®	ALUMINIUM	CAST IRON/STEEL	STAINLESS STEEL	Alloy C (Hastelloy Equiv.)	POLYPROPYLENE	ACETAL	PVDF	NYLON	RYTON®	UHMW POLYETHYLENE
Pyranol		X	A			A		A												
Pyridine N(CH) ₄ CH	X	X	X	C	X	X		A		A	B	A	50% A ^{100°}	C	A	X	X	A	A	
Pyroigneous Acid (Wood Vinegar)		C	C	C		A		A			B	X	10% A	A	X	A	X	A		
Pyrrole (Azole) C ₄ H ₅ N		X	X	X		C		A		C										
Quaternary Ammonium Salts NH ₄ (X)		A	A			A		A			X	A								
Quench Oil		B	B			A		A		A		A	A							
Rape-Seed Oil (Colza Oil)	C	C	B	A		A		A		B		A	A							
Rose Oil Geraniol, citronellol		C				A		A		A			A							
Rosin C ₂₀ H ₃₀ O ₂		C	A					A		A			A	A	A	B		A		A
Rosin Oil (Rosinol)		A	A			A		A												
Rotenone C ₂₃ H ₂₂ O ₆		A	A	A		A		A												
Rubber Latex Emulsions (C ₅ H ₈) _n /H ₂ O						A		A				A	A							
Rubber Solvents (Petroleum Distillate) Hydrocarbons		C	X			X		A		A		A	A							
Rum Alcoholic liquor from molasses	X	A	A	A		B		A		A			A	A						
Rust Inhibitors		C	A			A				B			A		A					
Salad Dressing Fats, oils, water			A			A				A	B	X	A		A					
Sal Ammoniac (Ammonium Chloride) NH ₄ Cl	A	A	A	A	A	A	A	A		A	X	X	B	A	A	X	A	B	A	
Sal Soda (Sodium Carbonate) NaCO ₃		A	A	A		A		A			X	A	A	A						
Salicylic Acid HOC ₆ • H ₂ COOH		B	B	A		B		A			A	X	B	A	A		A	A		A ^{140°}
Salt Water (Brine) NaCl/H ₂ O	A	B	A	A	A	A		A	A	A	B	X	A	A	A		A			
Sea Water (Brine)	A	B	A	A	X	A	A	A		A	A	C	A	A	A	A	A	A	A	A ^{140°}
Sesame Seed Oil Olein, stearin, palmitin		C	A			A		A		B		A	A							
Sewage	X	B	A	C	B	A	A	A	A	A	B	B	A	A	A		A			
Silicate Esters Si(OR) ₄	A	A	B	X	C	A		A		B										
Silicone Oils (Versilube Etc.) (CH ₃) ₂ SiO _{2n}	A	C	A	A	A	A		A		C	B	B	A	A	A		A	A	A	A
Silver Cyanide AgCN		A						A			X	A	A	A	A		A			A ^{140°}

Data limited to % concentration and/or temperature °F shown. Where not shown temperature is 70°F (21°C) Ambient.

CHEMICAL Formula	ELASTOMERS										METAL PARTS				PLASTICS					
	RUPPLON™ (Polyurethane)	NEOPRENE	NITRILE	E.P.D.M.	HYTREL®	(FKM) FLUOROCARBON	BLUE GYLON®	PTFE, PFA	ENVELON®	SANTOPRENE®	ALUMINUM	CAST IRON/STEEL	STAINLESS STEEL	Alloy C (Hastelloy Equiv.)	POLYPROPYLENE	ACETAL	PVDF	NYLON	RYTON®	UHMW POLYETHYLENE
Silver Nitrate AgNO ₃	A	A	B	A		A		A	A	A	X	X	60%A	60%A	A	A	A	A	A	A
Skydrol Hydraulic Fluid® (Phosphate Ester Base)		X	X	A	A	C		A		B			A	A				C		
Soap Solutions Salt of fatty acid in H ₂ O	A	B	A	A	A	A	A	A	A	A	C	X	A	A	A	A	A	A	A	A
Soda Ash (Sodium Carbonate) Na ₂ CO ₃		A	A	A	B	A	A	A	A	A	X	A	A	A						
Sodium Acetate CH ₃ COONa	X	C	C	A		X		A		A	A	A	A	A	A	A	A	B	A	A
Sodium Aluminate Na ₂ Al ₂ O ₄		A	A			A		A		A		50%A	50%A	10%B	A		A	A		
Sodium Bicarbonate (Baking Soda) NaHCO ₃		A	A	A	B	A	A	A	A	A	B	C	20%A	20%A	A	X	A	B	A	A
Sodium Bisulfite (Niter Cake) NaHSO ₄		A	A	A	B	A	A	A		A	50%B	C	50%B	B	A	C	A	B	A	A
Sodium Bisulfite (Cream of Tartar) NaHSO ₃		A	C	A	B	A		A		A	B	20%B	50%A	B	A	X	A	X		A
Sodium Borate Na ₂ B ₄ O ₇		A	A	A	B	A		A		A	B		A	A	A ^{140°}	C	A	A	A	A
Sodium Bromide NaBr								A			C	C	30%B	50%B	A		A	A		A ^{140°}
Sodium Chlorate NaClO ₃		B	A	A		A		A	A	A	70%B ^{212°}	B	B	70%B ^{212°}	A	B	A	B	A	A ^{140°}
Sodium Chloride (Table Salt) NaCl	A	A	A	A	A	A	A	A	A	A	B	30%B	A	A	A	A	A	A	A	A ^{140°}
Sodium Chromate Na ₂ CrO ₄		A	A		A	A		A	A	80%A ^{212°}	60%A	60%A	60%A	A		A	A			
Sodium Cyanide NaCN		A	A	A	A	A	A	A	A	A	X	A	A		A	C	A	B	A	A
Sodium Dichromate (Sodium Bichromate) Na ₂ Cr ₂ O ₇ • 2H ₂ O	A	B		A	20%X	A		A							A		A	X	A	A ^{140°}
Sodium Fluoride NaF		A	A	A		A		A			30%B		10%B	10%B	A		A	A		A ^{140°}
Sodium Hexametaphosphate (Calgon) (NaPO ₃) ₆	B	B	B	B		A		A			C	B	B	A						
Sodium Hydroxide (Caustic Soda) (Lye) NaOH	C	B	B	A	X	X		A	A	50%A	X	50%B	50%A	70%B ^{212°}	A	X	A	C	X	A ^{140°}
Sodium Hypochlorite NaClO	X	B	X	C	5%A	B	A	A	A	20%A	X	X	X	10%B	X	X	A	C	X	A ^{140°}
Sodium Metaphosphate (Kurrol's Salt) Na(PO ₃) ₃ H	B	C	B	A		A		A	A	A	X		B	A	X	B		A		A
Sodium Metasilicate Na ₂ SiO ₃		A	A			A				A	B		A	A	A	B	A			
Sodium Nitrate (Chile Saltpeter) NaNO ₃		B	C	A	B	A	A	A	A	A	90%A	90%A	90%A	30%A	A	A	A	B	A	A

RATING KEY: (A) Excellent (B) Good (C) Fair to Poor (X) Not Recommended □ No Data Available

CHEMICAL Formula	ELASTOMERS										METAL PARTS				PLASTICS					
	RUPPLON™ (Polyurethane)	NEOPRENE	NITRILE	E.P.D.M.	HYTREL®	(FKM) FLUOROCARBON	BLUE GYLON®	PTFE, PFA	ENVELON®	SANTOPRENE®	ALUMINUM	CAST IRON/STEEL	STAINLESS STEEL	Alloy C (Hastelloy Equiv.)	POLYPROPYLENE	ACETAL	PVDF	NYLON	RYTON®	UHMW POLYETHYLENE
Sodium Nitrite NaNO ₂		X	A			A		A			A	A	A	A						A ^{140°}
Sodium Perborate NaBO ₃		B	C	A	B	A	A	A	A	A	X	10%B	A	10%B	A	B	A	B		A
Sodium Peroxide (Sodium Dioxide) Na ₂ O ₂	X	B	B	B	B	A	A	A	A	B	10%B	90%A	10%B	10%B	B	X	A	X		A ^{140°}
Sodium Phosphate (Tribasic) (TSP) Na ₃ PO ₄	A	B	B	A	B	A	A	A	B	A	X	B ^{167°}	B	A	A		A	B		A
Sodium Silicates (Water Glass) Na ₂ O • SiO ₂		A	A	A	A	A		A	B	A	A	A	A	B	A		A	A	A	A
Sodium Sulfate (Salt Cake) (Thenardite) Na ₂ SO ₄	A	B	A	A	A	A	A	A	A	A	30%B	B	A	A			A	B	A	
Sodium Sulfide (Pentahydrate) Na ₂ S • 5H ₂ O	A	A	A	A	A	A	A	A	A	A	30%A ^{212°}	B	30%A ^{167°}	50%B ^{212°}	A	A	A	B	A	
Sodium Sulfite Na ₂ SO ₃	A	A	A	A	A	A		A			30%A	X	30%A	30%B ^{212°}	A	A	A	B	A	
Sodium Tetraborate Na ₂ B ₄ O ₇ • 10H ₂ O				A		B	A		A		A		A		C			A	B	A
Sodium Thiosulfate (Antichlor) Na ₂ S ₂ O ₃	A	A	A	A		A	A	A			A	C	A ^{122°}	B ^{122°}	A	B	A	B	A	
Sorgum			A	A				A			A		A	A	A					
Soybean Oil Triglycerides of acids		C	A	A	C	A	A	A	A	A	B	A	A	A	A	B	B		A	A
Soy Sauce Fermented soya bean/wheat			A	A				A			A		X	A						
Sperm Oil (Whale Oil) Fatty acid esters		X	A			A		A		B		A	A	A						
Stannic Chloride (Tin Chloride) SnCl ₄	B	B	A	B	B	A	A	A	A	A	X	C	10%A	B	A		A	B	A	
Stannous Chloride (Tin Chloride) SnCl ₂	B	A	A	B	15%B	A		A			X	B	10%A	A	A		A	B	A	
Starch *SEE NOTE BELOW C ₆ H ₁₀ O ₅		A	A	B	B	C		A	A	A	A	C	A	A	A	B		A	A	
Stearic Acid CH ₃ (CH ₂) ₁₆ CO ₂ H	A	B ^{158°}	B	B	B	A	A	A	A	B	C	C	A	B	A	C	A	A		
Stoddard Solvent Petroleum distillate	A	C	A	X	A		A	A		C	A	A	A	X	A	A	X	A		
Styrene (Vinylbenzene) C ₆ H ₅ CHCH ₂	C	X	X	X	X	A		A	A	C	A	A	A	A			A	A		
Sucrose Solution (Sugar) C ₁₂ H ₂₂ O ₁₁ /H ₂ O	X	A	A	A	A	A		A		A	A	A	A	A						
Sulfamic Acid H ₂ NSO ₃ H		A	B		A			A			10%A	X	X		X		X			
Sulfite Liquors			B	A	C	B	A		A		A			A						
Sulfur	S	B	B	X	A	A	A	A	A		A	A	A	A	B	A	A	A	A	A
Sulfur Chloride S ₂ Cl ₂		X	C	X	C	A	A	A	A	X	B	X	B	A	X		A	C		

Data limited to % concentration and/or temperature °F shown. Where not shown temperature is 70°F (21°C) Ambient.

CHEMICAL Formula	ELASTOMERS										METAL PARTS				PLASTICS					
	RUPPLON™ (Polyurethane)	NEOPRENE	NITRILE	E.P.D.M.	HYTREL®	(FKM) FLUOROCARBON	BLUE GYLON®	PTFE, PFA	ENVELON®	SANTOPRENE®	ALUMINUM	CAST IRON/STEEL	STAINLESS STEEL	Alloy C (Hastelloy Equiv.)	POLYPROPYLENE	ACETAL	PVDF	NYLON	RYTON®	UHMW POLYETHYLENE
Sulfur Dioxide SO ₂	B	A	X	B	X	A	A	A	A	A	A	B	10%A	80%A	A	B	A	C	A	
Sulfur Hexafluoride SF ₆		A	B	A	A	A	A		B											
Sulfur Trioxide SO ₃	B	C	C	C	X	A	A	A	A	C	B	B	B	B	X		X	A		
Sulfuric Acid 10% H ₂ SO ₄	B	A	B	A	A	A	A	A	A	A	X	X	A	A	A		A	X	X	
Sulfuric Acid 25% H ₂ SO ₄	X	B	C	B	A	A	A	A	A	A	X	X	B	A	A		A ^{150°}	X	X	
Sulfuric Acid 50% H ₂ SO ₄	X	B	C	B	A	A	A	A	A	A	X	X	X	A	A		A ^{150°}	X	X	
Sulfuric Acid 60% H ₂ SO ₄	X	C	X	B	X	A	A	A	A	A	X	X	X	A	A		A ^{150°}	X	X	
Sulfuric Acid 75% H ₂ SO ₄	X	X	X	C	X	A	A	A	A	A	X	C	C	A	A		A ^{150°}	X	X	
Sulfuric Acid 95% H ₂ SO ₄	X	X	X	C	X	A	A	A	B	A	X	B	A	A	X		A ^{120°}	X	X	
Sulfuric Acid (Conc.) H ₂ SO ₄	X	X	X	C		A		A	B	98%B	X	B	B	A	X		A ^{120°}	X		
Sulfuric Acid (Fuming) H ₂ SO ₄	X	X	X	X	20%X	B	A	A			C	X	B	B						
Sulfurous Acid H ₂ SO ₃	X	X	B	C	C	A	A	A	A	A	B	X	B	B	A	X	A	X	A	A ^{140°}
Tall Oil (Liquid Rosin) Rosin acids		B	A	X		A		A		A	X	B ^{212°}	B	A	A		A			
Tallow Fat from cattle, sheep			A			A		A		B	A		A		B	C		A		A
Tannic Acid C ₇₆ H ₅₂ O ₄₆	A	B	C	C	10%A	A	A	A	A	A	A	A	A	10%B	A	X	A	A	A	
Tanning Liquors Tannic acid		B	A							A	A		A	A	A	X				A ^{140°}
Tar, Bituminous(Coal Tar) (Pitch) Mixture of aromatic & phenolic hydrocarbons		C	B	X	X	A	A	A	A	B	A		A	A	A			C		
Tartaric Acid C ₄ H ₆ O ₆	A	A	B	B	B	A	A	A	A	A	20%A	X	A	90%A	A	X	A	A	A	
Terpenes C ₁₀ hydrocarbons	C	X	C	X		A		A			A	X								A
Terpineol (Terpilenol) C ₁₀ H ₁₆ O	X	X	C	C		A		A		B	A	A	A	A	X		B ^{120°}			
Tertiary Butyl Alcohol (CH ₃) ₃ COH		A	A			B		A		B					B					
Tertiary Butyl Catechol C ₉ H ₁₄ O ₂		B	X			A		A		B	C	B	B							
Tertiary Butyl Mercaptan C ₄ H ₁₀ S		X	X			A		A		B										
Tetra Bromomethane CBr ₄		X	X			A		A	A	X	X				X					
Tetrabutyl Titanate Ti(C ₄ H ₉) ₄		A	B	B		A		A		B										

RATING KEY: (A) Excellent (B) Good (C) Fair to Poor (X) Not Recommended □ No Data Available

CHEMICAL Formula	ELASTOMERS									METAL PARTS				PLASTICS						
	RUPPLON™ (Polyurethane)	NEOPRENE	NITRILE	E.P.D.M.	HYTREL®	(FKM) FLUOROCARBON	BLUE GYLON®	PTFE, PFA	ENVELON®	SANTOPRENE®	ALUMINUM	CAST IRON/STEEL	STAINLESS STEEL	Alloy C (Hastelloy Equiv.)	POLYPROPYLENE	ACETAL	PVDF	NYLON	RYTON®	UHMW POLYETHYLENE
Tetrachloroethylene $Cl_2C = CCl_2$								A	X								A			B
Tetrachlorodifluoroethane $(Cl_2FC)_2$		X	X				A													
Tetrachloroethane (Acetylene Tetrachloride) $(Cl_2HC)_2$		X	X	X		A	A		X	X	A	C	90%A ^{212°}	X	A	A	C			
Tetraethyl Lead $Pb(C_2H_5)_4$		X	B	X		B	A		C	B	A	A		A		A				A ^{140°}
Tetraethylene Glycol (TEG) $HOCH_2(CH_2OCH_2)_3CH_2OH$						A	A													
Tetrahydrofuran (THF) C_4H_8O	C	X	X	C	C	X	A	A	B					C ^{100°}	A	B ^{70°}	A	A	B	
Tetrahydronaphthalene (Tetralin) $C_{10}H_{12}$		X	X	X		A	A			A	A	A	A	C			A	A	X	
Thionyl Chloride $SOCl_2$		X	X	X		B	A	A	B	C	A	A	10%A	B	B	X	X			C
Thiophene C_4H_4S		X	X	X		C	A													
Titanium Tetrachloride $TiCl_4$		X	C	X		A	A	A	X	X	A	B	B	B		B	A			
Toluene (Toluol) C_7H_8	X	X	C	X	C	B	A	A	C	A	A	A	A	X	B	A	A	A	A	X
Toluene Diisocyanate $CH_3C_6H_3(NCO)_2$		X		A	B			A	B											
Toluidine $CH_3C_6H_4 \cdot H_2NH_2$			X			B		A		A	A	A	A							
Tomato Pulp & Juice			A					A	A	B		A	A	A		A	A	A	A	
Toothpaste		C	A			A		A			X	A	A							
Transformer Oil (Petroleum) Hydrocarbons	X	C	B	X		A		A	X	A	A	A	A	B	C			A		A
Transmission Fluid (Type A)	A	C	A	X	B	A		A	C	A	A	A	A							
Triacetin $C_3H_5(OCOCH_3)_3$	X	B	A	A		X		A	A	B										
Triallyl Phosphate $P(OC_3H_7)_3$	C	C	X	A		A		A						B		A	A			
Triaryl Phosphate $(C_6H_5O)_3PO$		C	X			A		A												
Tributoxyl Ethyl Phosphate $(C_4H_9O)_3P(C_2H_5)$	X	X	X	A		B		A	B											
Tributyl Phosphate (TBP) $(C_4H_9)_3PO_4$	X	X	X	C	C	X		A	B	A	A	A		B ^{100°}		A ^{100°}	B			
Dibutyl Mercaptan $(C_4H_9)_2S$		X	X			A		A	B											
Trichloroacetic Acid (TCA) CCl_3COOH		B	C	C	X	B		A	A	B	X	X	X	B	B		B	X	A	C ^{140°}
Trichlorobenzenes $C_6H_3Cl_3$		X	X			B		A		X	A	A	B							
Trichloroethane $C_2H_3Cl_3$	X	X	X	X		B		A	X	X	A	A	A	X		A	X	A		

Data limited to % concentration and/or temperature °F shown. Where not shown temperature is 70°F (21°C) Ambient.

CHEMICAL Formula	ELASTOMERS										METAL PARTS				PLASTICS					
	RUPPLON™ (Polyurethane)	NEOPRENE	NITRILE	E.P.D.M.	HYTREL®	(FKM) FLUOROCARBON	BLUE GYLON®	PTFE, PFA	ENVELON®	SANTOPRENE®	ALUMINUM	CAST IRON/STEEL	STAINLESS STEEL	Alloy C (Hastelloy Equiv.)	POLYPROPYLENE	ACETAL	PVDF	NYLON	RYTON®	UHMW POLYETHYLENE
Trichloroethylene (Ex-Tri) (Hi-Tri)® C ₂ HCl ₃	X	X	X	X	X	C	A	A	A	X	X	B	90% A 167*	A	X	B	A	C	A	X
Trichloropropane CH ₂ ClCHClCH ₂ Cl		A	X			B		A		X	X	A	A	A	X					
Tricresyl Phosphate (Lindol) (TCP)® (CH ₃ C ₆ H ₄ O) ₃ • PO	X	C	X	A	C	C		A	A	B		A	B	A	B		X	A		
Tricresyl Alcohol (Tridecanol) C ₁₂ H ₂₅ • CH ₂ OH			A			B		A												
Triethanol Amine (TEA) N(C ₂ H ₅ OH) ₃	X	A	X	B	X	C		A	A	A	A	A	A	A	A	B	X	A	A	A
Triethyl Aluminum (ATE) Al(C ₂ H ₅) ₃		X	X			B		A	A	B										
Triethyl Amine (CH ₃ CH ₂) ₃ N		B	A					A				A	A	A	C		A ^{120*}			
Triethyl Borane (C ₂ H ₅) ₃ B		X	X			A		A		B										
Triethylene Glycol (TEG) (CH ₂ OCH ₂ CH ₂ OH) ₂			A			A		A						A				A		
Trimethylene Glycol HO(CH ₂) ₃ OH			A	A		A		A			A	A	A	A						
Trinitrotoluene (TNT) CH ₃ C ₆ H ₂ (NO ₂) ₃		B	X	X		C		A		A										
Trioctyl Phosphate (C ₈ H ₁₇ O) ₃ PO		X	X	A		B		A		B										
Tung Oil (Wood Oil) Fatty acids	C	C	A	X	B	A		A	A	B	A		A	A	A					
Turpentine C ₁₀ H ₁₆	X	X	A	X	B	A	A	A	A	C	A	A	A	A	X	A	A	B	A	C
Unsymmetrical Dimethyl Hydrazine (UDMN) H ₂ NN(CH ₃) ₂		C	C	A		X		A		B							A			
Urea (Carbamide) CO(NH ₂) ₂		B	B		B	A		A			B		50% B		A	A	A	A	A	A
Urine		X	A			A		A		A	A	A	A	A	A	C	A	A		A ^{140*}
Valeric Acid CH ₃ (CH ₂) ₃ COOH		X	X	A				A			A									
Vanilla Extract (Vanillin) C ₆ H ₃ (CHO) • (OCH ₃)(OH)		X	A			X		A					A							A ^{140*}
Varnish Oil, gum resins, oil of turpentine		C	B	X		A		A	A		A		A	A	A		A	X		A
Vegetable Juices		C	A							A	C		A							
Vegetable Oils	A	C	B	A		A		A		B	A	B	A	A	X			A	A	A
Vinegar Dilute acetic acid	X	B	C	A	C	A	A	A	A	A	C	X	A	A	A	C	A	X	A	A ^{140*}
Vinyl Acetate CH ₃ COOC, HCH ₂		B	X			X		A			B	A	A	A	B		A			X
Vinyl Chloride (Chloroethylene) CH ₂ CHCl		X	X	C		A		A	A	X	X	A	A	A	X		B	A		

RATING KEY: (A) Excellent (B) Good (C) Fair to Poor (X) Not Recommended □ No Data Available

CHEMICAL Formula	ELASTOMERS									METAL PARTS				PLASTICS						
	RUPPLON™ (Polyurethane)	NEOPRENE	NITRILE	E.P.D.M.	HYTREL®	(FKM) FLUOROCARBON	BLUE GYLON®	PTFE, PFA	ENVELON®	SANTOPRENE®	ALUMINIUM	CAST IRON/STEEL	STAINLESS STEEL	Alloy C (Hastelloy Equiv.)	POLYPROPYLENE	ACETAL	PVDF	NYLON	RYTON®	UHMW POLYETHYLENE
Walnut Oil		B	A			A		A												
Water, Distilled (Also Deionized) H ₂ O	A	C	A	A		A	A	A	A	A	A	C	A	A	A	A	A	A	A	A ^{140°}
Water, Fresh H ₂ O	A	B	A	A	A ^{72°}	A	A	A	A	A	A	A	A	A	A	A	A	B	A	A ^{140°}
Waxes Hydrocarbons		A	A	X				A	A		A		A		A			A		A
Weed Killers		C	B			A				B	X		A							
Whiskey Ethanol, esters, acids	A	A	B	A	B	A	A	A	A	A	A	X	A	A	A	B	A	A		A
White Oil (Mineral) (Petroleum) Mixture of liquid hydrocarbons		C	A	X		A		A		C			A	A						A
White Sulfate Liquor		A	B	A		B		A			B	C	A	B	A		A			
Wines	X	A	A	A	A	B	A	A	A	A	C	X	A	A	A	B	A	A		A ^{140°}
Wort, Distillery Sugar solution from malt		A				A		A			A	B	A	A						
Xylene (Xylol) C ₆ H ₄ (CH ₃) ₂	X	X	X	X	C	A		A	A	C	A	B	B	A	X	A	A	A	A	X
Xylidines (Xylidin) (CH ₃) ₂ C ₆ H ₃ NH ₂		X		X		X		A		C	B	B								
Zeolite Hydrated alkali aluminum silicates		C	C	A		A		A		A			A	A						
Zinc Acetate Zn(C ₂ H ₃ O ₂) ₂		B	C	A		X		A		A	C				A		A			
Zinc Carbonate ZnCO ₃			A			A		A			B	B	B	B						
Zinc Chloride ZnCl ₂	A	B	B	A	A	A	A	A	A	A	10%A	B	10%A	A	A	B	A	C	A	A ^{140°}
Zinc Hydrosulfite ZnHSO ₃		A	A			A		A		A	X		A							
Zinc Sulfate ZnSO ₄		A	A	A	X	B	A	A	A	A	20%B	X	B	90%B	A	B	A	B	A	A

Gylon and Envelon — Registered tradenames of Garlock Inc.

Hytrel, Delrin — Registered tradenames of E.I. DuPont.

Ryton — Registered tradename of Phillips Chemical Co.

Santoprene — Registered tradename of Exxon Mobil Corp.

SANDPIPER, MARATHON, Rupplon, Tranquilizer and Warren Rupp — Registered tradenames of Warren Rupp, Inc.

RATING KEY: (A) Excellent (B) Good (C) Fair to Poor (X) Not Recommended □ No Data Available

Data limited to % concentration and/or temperature °F shown. Where not shown temperature is 70°F (21°C) Ambient.

WITH MORE WAYS THAN ONE

SANDPIPER[®]

A WARREN RUPP, INC. BRAND

PH: 419.524.8388 • Fax: 419.522.7867 • www.sandpiperpump.com

Warren Rupp, Inc., A Unit of IDEX Corp. • 800 N. Main St. • P.O. Box 1568 • Mansfield, OH 44901 USA

IDEX[®]
FLUID & METERING
spchem-rev0610